

The Multiplicity CPS-Accessories

NFH

Using material of high quality



- Material: High Quality Polyamide6
- Temperature Range: -40°C to $+105^{\circ}\text{C}$
- Short Term: up to $+150^{\circ}\text{C}$
- Self-Extinguishing: UL94-HB, UL94-Vo
Free of Halogen Phosphorous and cadmium
- Color: Black & Gray
- Application: Fixing tubes


By making more screw holes the clip is more stable and the hinge cover is easy to use.

This new clip was developed to facilitate straight arrangement and be installable at any size.


- 재 질: 고품질 폴리아미드6
- 적용온도범위: -40°C + 105°C
- 순간최대온도: $+150^{\circ}\text{C}$
- 자 기 소 화 성: UL94-HB, UL94-Vo
Free of Halogen Phosphorous and cadmium
- 색 상: 검정색 회색
- 적 용: 튜브를 고정시키기 위해 사용되는 커넥터.

커버를 힌지방식으로 결합하며 결합 후 강한충격에도 커버가 열리지 않으며 사이즈가 다른 제품과의 결합가능한 구조로 기능성과 효율성을 높임.


다수의 고정홀을 통해 설치장소의 제약을 감소시켰으며 튜브의 고정성을 더욱 높임.

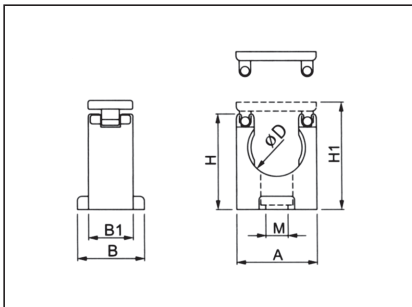

NFH-07/10

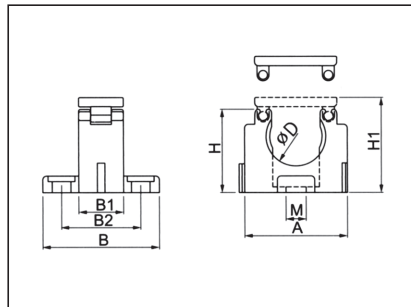

NFH-12/16/22

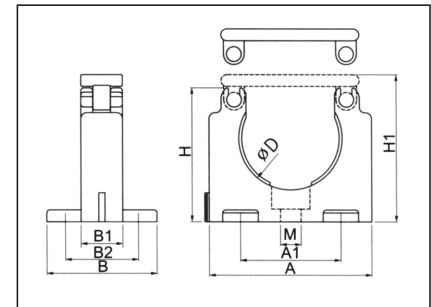

NFH-28~95

품 번Order No		치 수 (Dimensions in mm)								
Black	Gray	ØD	A	A1	B	B1	B2	H	H1	M
NFH-07B	NFH-07G	10	16.6	-	14.5	10	-	18	20.7	1EA × M4
NFH-10B	NFH-10G	13	23	-	15	10	-	21.7	24.5	1EA × M4
NFH-12B	NFH-12G	16	27.5	-	31.2	14	21.2	22.5	25.7	3EA × M5
NFH-16B	NFH-16G	21.5	34.2	-	36	14	24	29.5	33.3	3EA × M5
NFH-22B	NFH-22G	29	45.5	-	38	14	24	38	42.2	3EA × M6
NFH-28B	NFH-28G	35	55	34	37	14	25	45.3	49.8	5EA × M6
NFH-36B	NFH-36G	42	66	37.5	41.5	14	27	54.3	59.5	5EA × M6
NFH-48B	NFH-48G	54	84.8	56	41.5	14	27	66.8	73.1	5EA × M6
NFH-56B	NFH-56G	66.8	98.6	64.6	52	19	35.5	79.7	86.3	5EA × M6
NFH-70B	NFH-70G	82	121	79	63	23	43	97.6	105.8	5EA × M6
NFH-95B	NFH-95G	105.6	155.4	103.4	82	30	56	125.8	136.3	5EA × M6