


Ball Bearings

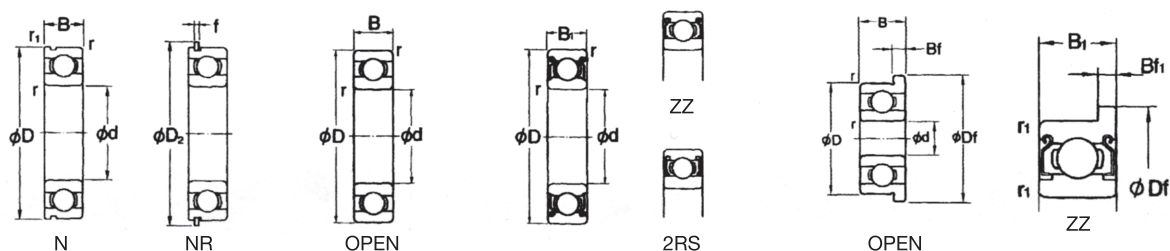

R SERIES

Bearing No.	d	D	B ₁	B	r _{min}	Df	Bf ₁	B f
R09	1.016	3.175	-	1.191	0.1	-	-	-
R0	1.191	3.9675	2.38	1.5875	0.1	5.156	0.7874	0.33
R1	1.397	4.7625	2.7788	1.984	0.1	5.944	0.7874	0.584
R1-4	1.984	6.35	3.5712	2.38	0.1	7.518	0.7874	0.584
R1-5	2.38	7.9375	3.5712	2.7788	0.08	9.119	0.7874	0.584
R2-5	3.175	7.9375	3.5712	2.7788	0.08	9.119	0.7874	0.584
R2-6	3.175	9.525	3.5712	2.7788	0.13	10.719	0.7874	0.584
R2	3.175	9.525	3.9675	3.9675	0.3	11.176	0.762	0.762
R2A	3.175	12.7	4.3663	4.3663	0.3	-	-	-
R3	4.7625	12.7	4.9784	3.9675	0.3	14.351	1.0668	1.0668
R3A	4.7625	15.875	4.9784	4.9784	0.3	17.526	1.0668	-
R4	6.35	15.875	4.9784	4.9784	0.3	17.526	1.0668	1.0668
R4-11	6.35	17.4625	7.9197	-	0.3	-	-	-
R4A	6.35	19.05	7.1425	5.5575	0.4	17.526	1.0668	-
R5A	7.9375	22.225	7.1425	-	0.4	-	-	-
R6	9.525	22.225	7.1425	5.5575	0.4	24.613	1.575	1.575
R6A	9.525	22.225	5.5575	-	0.4	-	-	-
R8-7	11.113	28.575	7.9375	6.35	0.4	-	-	-
R8	12.7	28.575	-	6.35	0.4	31.115	1.575	1.575
R10	15.875	34.925	8.7325	7.142	0.6	-	-	-
R12	19.05	41.275	11.112	7.9375	0.6	-	-	-
R14	22.225	47.625	12.7	9.525	0.6	-	-	-
R16	25.4	50.8	12.7	9.525	0.6	-	-	-
R18	28.575	53.975	12.7	9.525	0.6	-	-	--
R20	31.75	57.15	12.7	9.525	1	-	-	-
R22	34.925	63.5	14.288	11.112	1	-	-	-
R24	38.1	66.675	14.288	11.112	1	-	-	-
R133	2.38	4.7625	2.38	1.5875	0.1	5.9436	0.7874	0.457
R144	3.175	6.35	2.7788	2.38	0.1	7.518	0.7874	0.5842
R155	3.9675	7.9375	3.175	2.7788	0.1	9.119	0.9144	0.5842
R156	4.7625	7.9375	3.175	2.7788	0.1	9.119	0.9144	0.5842
R164	3.175	9.525	2.38	2.38	-	-	-	-
R166	4.7625	9.525	3.175	3.175	0.1	10.719	0.7874	0.5842
R168	6.35	9.525	3.175	3.175	0.1	10.719	0.9144	0.5842
R174	3.175	10.414	2.7788	2.7788	-	-	-	-
R184	3.175	12.7	2.7788	2.7788	-	-	-	-
R186	4.7625	12.7	3.9675	2.7788	-	-	-	-
R188	6.35	12.7	4.7625	3.175	0.13	13.894	1.143	0.5842
R1038	9.525	15.875	3.9675	3.9675	0.15	-	-	-
R1204	3.175	19.05	-	3.175	-	-	-	-
R1212	12.7	19.05	3.9675	-	0.14	-	-	-
R1810	1.9375	12.7	3.9675	3.9675	0.13	13.894	0.7874	0.7874