


TIMING PULLEYS

同步带轮

■ HTD 3M Series / 系列

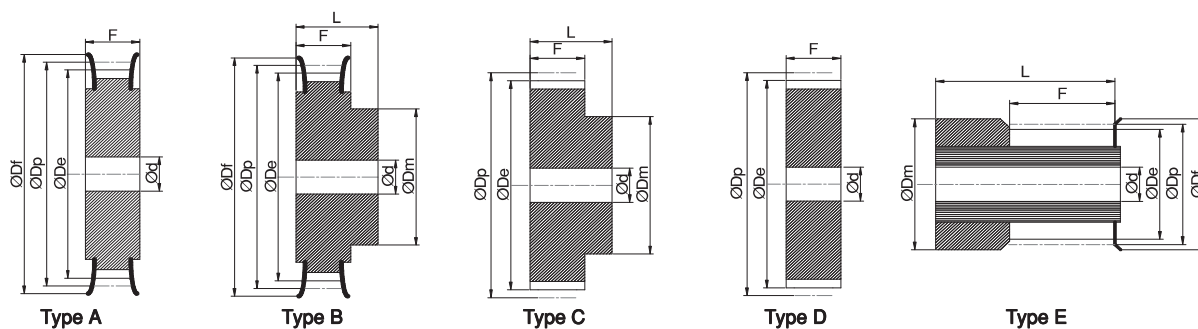

• Dimensions / 尺寸

Unit / 单位 : mm

Type 类型	Teeth 齿数	Dp	De	Df	Dm	d	For Belt Width / 同步带宽度					
							6 mm		9 mm		15 mm	
							F	L	F	L	F	L
E	10	9.55	8.79	12	12	-	7	14	10.2	17.5	17	26
E	11	10.50	9.74	12	12	-	7	14	10.2	17.5	17	26
E	12	11.46	10.70	15	15	-	7	14	10.2	17.5	17	26
E	13	12.41	11.65	15	15	-	7	14	10.2	17.5	17	26
E	14	13.37	12.61	16	16	-	7	14	10.2	17.5	17	26
E	15	14.32	13.56	17.5	17.5	-	7	14	10.2	17.5	17	26
A, B, C, D	16	15.28	14.52	17.5	10	4	9.8	16	12.8	20.6	19.5	26
A, B, C, D	18	17.19	16.43	19.5	11	6	9.8	16	12.8	20.6	19.5	26
A, B, C, D	20	19.10	18.34	23	13	6	9.8	16	12.8	20.6	19.5	26
A, B, C, D	21	20.05	19.29	25	14	6	9.8	16	12.8	20.6	19.5	26
A, B, C, D	22	21.01	20.25	25	14	6	9.8	16	12.8	20.6	19.5	26
A, B, C, D	24	22.92	22.16	25	14	6	9.8	16	12.8	20.6	19.5	26
A, B, C, D	26	24.83	24.07	28	16	6	9.8	16	12.8	20.6	19.5	26
A, B, C, D	28	26.74	25.98	32	18	6	9.8	16	12.8	20.6	19.5	26
A, B, C, D	30	28.65	27.89	32	20	6	9.8	16	12.8	20.6	19.5	26
A, B, C, D	32	30.56	29.80	36	22	6	9.8	16	12.8	20.6	19.5	26
A, B, C, D	36	34.38	33.62	38	26	6	10.4	17	13.4	22.2	20	30
A, B, C, D	40	38.20	37.44	42	28	6	10.4	17	13.4	22.2	20	30
A, B, C, D	44	42.02	41.26	48	33	6	10.4	17	13.4	22.2	20	30
A, B, C, D	48	45.84	45.08	51	33	8	10.4	17	13.4	22.2	20	30
A, B, C, D	60	57.30	56.54	63	33	8	10.4	17	13.4	22.2	20	30
A, B, C, D	72	68.76	68.00	75	33	8	10.4	17	13.4	22.2	20	30

- Non-standard Timing Pulleys are machined on request. Please contact us.

如要求设计非标准规格的同步带轮，请与我们联系。

ORDERING EXAMPLE

订购示例

