


RUBBER TIMING BELT - NP ENDLESS TIMING BELT

无尽头型同步带(氯丁二烯橡胶)

■ HTD 5M Series / 系列

Material: Neoprene / 材料: 氯丁二烯橡胶

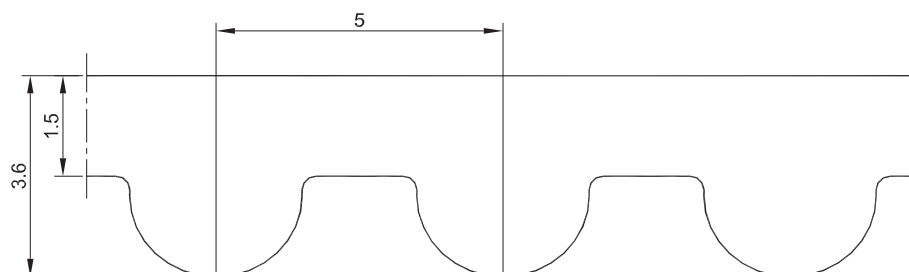

• Specifications / 规格

Unit / 单位 : mm

Standard Belt Width (mm) 标准带宽	9	15	25
Breaking Strength (N) 断裂强度	1,850	3,675	6,370
Max. Traction Load (N) 最大牵引负载	600	1,180	2,050

HTD 5M		
Code 代码	Pitch Length 节距长度 (mm)	Teeth 齿数
HTD 5M / 225	225	45
HTD 5M / 265	265	53
HTD 5M / 275	275	55
HTD 5M / 295	295	59
HTD 5M / 300	300	60
HTD 5M / 330	330	66
HTD 5M / 350	350	70
HTD 5M / 375	375	75
HTD 5M / 400	400	80
HTD 5M / 425	425	85
HTD 5M / 450	450	90
HTD 5M / 460	460	92
HTD 5M / 475	475	95
HTD 5M / 500	500	100
HTD 5M / 525	525	105
HTD 5M / 535	535	107
HTD 5M / 550	550	110
HTD 5M / 565	565	113
HTD 5M / 580	580	116
HTD 5M / 600	600	120
HTD 5M / 615	615	123
HTD 5M / 620	620	124
HTD 5M / 665	665	133
HTD 5M / 700	700	140
HTD 5M / 710	710	142
HTD 5M / 740	740	148
HTD 5M / 755	755	151
HTD 5M / 800	800	160
HTD 5M / 835	835	167
HTD 5M / 890	890	178
HTD 5M / 900	900	180
HTD 5M / 925	925	185
HTD 5M / 950	950	190
HTD 5M / 1000	1,000	200
HTD 5M / 1050	1,050	210
HTD 5M / 1125	1,125	225
HTD 5M / 1270	1,270	254

HTD 5M		
Code 代码	Pitch Length 节距长度 (mm)	Teeth 齿数
HTD 5M / 1420	1420	284
HTD 5M / 1500	1500	300
HTD 5M / 1595	1,595	319
HTD 5M / 1790	1,790	358
HTD 5M / 1800	1,800	360
HTD 5M / 1870	1,870	374
HTD 5M / 2000	2,000	400
HTD 5M / 2525	2,525	505

ORDERING EXAMPLE

订购示例

15 HTD 5M / 330 - NP

Belt Width / 同步带宽

HTD 5M Series / 系列

Pitch Length / 节距长度

Material : Neoprene

材料: 氯丁二烯橡胶