


RUBBER TIMING BELT - NP ENDLESS TIMING BELT

无尽头型同步带(氯丁二烯橡胶)

HTD 8M Series / 系列

Material: Neoprene / 材料: 氯丁二烯橡胶

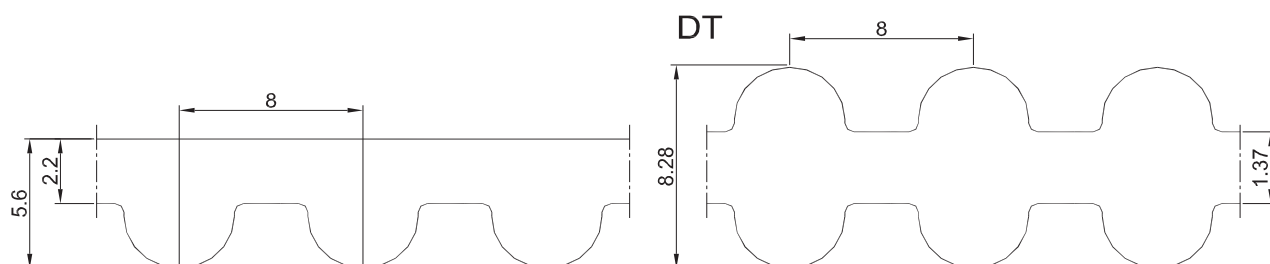

Specifications / 规格

Unit / 单位 : mm

Standard Belt Width (mm) 标准带宽	20	30	50	85
Breaking Strength (N) 断裂强度	9,960	14,940	27,400	47,320
Max. Traction Load (N) 最大牵引负载	2,920	4,390	8,050	13,900

HTD 8M		
Code 代码	Pitch Length 节距长度 (mm)	Teeth 齿数
HTD 8M / 376	376	47
HTD 8M / 424	424	53
HTD 8M / 472	472	59
HTD 8M / 480	480	60
HTD 8M / 560	560	70
HTD 8M / 600	600	75
HTD 8M / 624	624	78
HTD 8M / 640	640	80
HTD 8M / 656	656	82
HTD 8M / 720	720	90
HTD 8M / 776	776	97
HTD 8M / 784	784	98
HTD 8M / 800	800	100
HTD 8M / 880	880	110
HTD 8M / 912	912	114
HTD 8M / 920	920	115
HTD 8M / 960	960	120
HTD 8M / 1040	1,040	130
HTD 8M / 1120	1,120	140
HTD 8M / 1200	1,200	150
HTD 8M / 1280	1,280	160
HTD 8M / 1304	1,304	163
HTD 8M / 1328	1,328	166
HTD 8M / 1360	1,360	170
HTD 8M / 1424	1,424	178
HTD 8M / 1440	1,440	180
HTD 8M / 1600	1,600	200
HTD 8M / 1760	1,760	220
HTD 8M / 1800	1,800	225
HTD 8M / 2248	2,248	281
HTD 8M / 2400	2,400	300
HTD 8M / 2800	2,800	350

DT - HTD 8M		
Code 代码	Pitch Length 节距长度 (mm)	Teeth 齿数
DT - HTD 8M / 480	480	60
DT - HTD 8M / 560	560	70
DT - HTD 8M / 600	600	75
DT - HTD 8M / 640	640	80
DT - HTD 8M / 720	720	90
DT - HTD 8M / 800	800	100
DT - HTD 8M / 880	880	110
DT - HTD 8M / 960	960	120
DT - HTD 8M / 1040	1,040	130
DT - HTD 8M / 1120	1,120	140
DT - HTD 8M / 1200	1,200	150
DT - HTD 8M / 1280	1,280	160
DT - HTD 8M / 1440	1,440	180
DT - HTD 8M / 1600	1,600	200
DT - HTD 8M / 1760	1,760	220
DT - HTD 8M / 1800	1,800	225
DT - HTD 8M / 2000	2,000	250
DT - HTD 8M / 2400	2,400	300
DT - HTD 8M / 2600	2,600	325
DT - HTD 8M / 2800	2,800	350
DT - HTD 8M / 3048	3,048	381
DT - HTD 8M / 3280	3,280	410
DT - HTD 8M / 3600	3,600	450
DT - HTD 8M / 4400	4,400	550
DT - HTD 8M / 4960	4,960	620

ORDERING EXAMPLE

订购示例

20 HTD 8M / 880 - NP
 └──────────┴──────────┴──────────┘
 Belt Width / 同步带宽 HTD 8M Series / 系列 Pitch Length / 节距长度
 Material : Neoprene
 材料: 氯丁二烯橡胶