
## **RUBBER TIMING BELT - NP ENDLESS TIMING BELT**



## 无尽头型同步带(氯丁二烯橡胶)

## ■ HTD 14M Series /系列

Material: Neoprene / 材料: 氯丁二烯橡胶

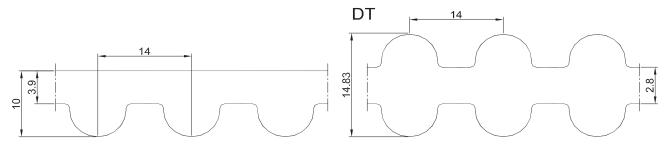

## • Specifications / 规格

• Specifications / 规格	Unit /单位 :mm			
Standard Belt Width ( mm ) 标准带宽	40	55	85	115
Breaking Strength ( N ) 断裂强度	30,200	37,760	67,960	87,400
Max. Traction Load ( N ) 最大牵引负载	9,260	11,570	20,830	28,800

HTD 14M				
Code 代码	Pitch Length 节距长度 (mm)	Teeth 齿数		
HTD 14M / 966	966	69		
HTD 14M / 1190	1,190	85		
HTD 14M / 1610	1,610	115		
HTD 14M / 1890	1,890	135		
HTD 14M / 2100	2,100	150		
HTD 14M / 2310	2,310	165		
HTD 14M / 2590	2,590	185		
HTD 14M / 2800	2,800	200		
HTD 14M / 3150	3,150	225		
HTD 14M / 3850	3,850	275		
HTD 14M / 4326	4,326	309		
HTD 14M / 4578	4,578	327		

HTD 14M				
Code 代码	Pitch Length 节距长度 (mm)	Teeth 齿数		
DT - HTD 14M / 1610	1,610	115		
DT - HTD 14M / 1778	1,778	127		
DT - HTD 14M / 1890	1,890	135		
DT - HTD 14M / 2100	2,100	150		
DT - HTD 14M / 2310	2,310	165		
DT - HTD 14M / 2450	2,450	175		
DT - HTD 14M / 2590	2,590	185		
DT - HTD 14M / 2800	2,800	200		
DT - HTD 14M / 3150	3,150	225		
DT - HTD 14M / 3360	3,360	240		
DT - HTD 14M / 3500	3,500	250		
DT - HTD 14M / 3850	3,850	275		
DT - HTD 14M / 4326	4,326	309		
DT - HTD 14M / 4578	4,578	327		
DT - HTD 14M / 4956	4,956	354		
DT - HTD 14M / 5320	5,320	380		
DT - HTD 14M / 5740	5,740	410		
DT - HTD 14M / 6160	6,160	440		
DT - HTD 14M / 6860	6,860	490		

