
TIMING PULLEYS 同步带轮

■ MXL Series / 系列

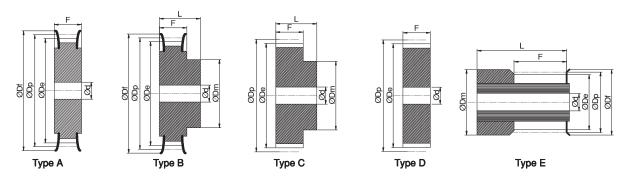

• Dimensions / 尺寸 Unit /单位 : mm

| Type 类型 | | Dp | De | Df | Dm | d | For Belt Width / 同步带宽度 | | | | | |
|------------|-------|-------|-------|------|----|---|------------------------|----|-----------------------|----|-----------------------|------|
| | Teeth | | | | | | 025 6.35 mm | | 037 9.53 mm | | 050 12.7 mm | |
| | 齿数 | | | | | | | | | | | |
| | | | | | | | F | L | F | L | F | L |
| E | 12 | 7.76 | 7.25 | 12 | 12 | - | 9 | 16 | 12 | 19 | 15.2 | 22.2 |
| E | 13 | 8.41 | 7.90 | 12 | 12 | - | 9 | 16 | 12 | 19 | 15.2 | 22.2 |
| E | 14 | 9.06 | 8.55 | 12 | 13 | - | 9 | 16 | 12 | 19 | 15.2 | 22.2 |
| E | 15 | 9.70 | 9.19 | 12 | 14 | - | 9 | 16 | 12 | 19 | 15.2 | 22.2 |
| E | 16 | 10.35 | 9.84 | 15 | 14 | - | 9 | 16 | 12 | 19 | 15.2 | 22.2 |
| E | 17 | 11.00 | 10.49 | 15 | 15 | - | 9 | 16 | 12 | 19 | 15.2 | 22.2 |
| E | 18 | 11.64 | 11.13 | 15 | 15 | - | 9 | 16 | 12 | 19 | 15.2 | 22.2 |
| E | 19 | 12.29 | 11.78 | 16 | 16 | - | 9 | 16 | 12 | 19 | 15.2 | 22.2 |
| E | 20 | 12.94 | 12.43 | 16 | 16 | - | 9 | 16 | 12 | 19 | 15.2 | 22.2 |
| A, B, C, D | 21 | 13.58 | 13.07 | 17.5 | 10 | 3 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 22 | 14.23 | 13.72 | 17.5 | 10 | 3 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 24 | 15.52 | 15.01 | 19.5 | 11 | 3 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 25 | 16.17 | 15.66 | 19.5 | 11 | 3 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 26 | 16.82 | 16.31 | 23 | 11 | 3 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 27 | 17.46 | 16.95 | 23 | 11 | 3 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 28 | 18.11 | 17.60 | 23 | 11 | 3 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 30 | 19.40 | 18.89 | 25 | 14 | 4 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 32 | 20.70 | 20.19 | 25 | 14 | 4 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 36 | 23.29 | 22.78 | 28 | 16 | 4 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 40 | 25.87 | 25.36 | 32 | 18 | 4 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 42 | 27.17 | 26.66 | 32 | 18 | 5 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 44 | 28.46 | 27.95 | 32 | 18 | 5 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 45 | 29.11 | 28.60 | 36 | 18 | 5 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 48 | 31.05 | 30.54 | 36 | 20 | 5 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 50 | 32.34 | 31.83 | 38 | 20 | 5 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 60 | 38.81 | 38.30 | 44 | 24 | 5 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 64 | 41.40 | 40.89 | 48 | 25 | 6 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 65 | 42.04 | 41.53 | 48 | 25 | 6 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 70 | 45.28 | 44.77 | 51 | 25 | 6 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 72 | 46.57 | 46.06 | 51 | 25 | 6 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 75 | 48.51 | 48.00 | 54 | 26 | 6 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 90 | 58.21 | 57.70 | 66 | 28 | 6 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |
| A, B, C, D | 110 | 71.15 | 70.64 | 79 | 30 | 6 | 11 | 16 | 14 | 19 | 17.2 | 22.2 |

Non-standard Timing Pulleys are machined on request. Please contact us.
如要求设计非标准规格的同步带轮,请与我们联系。

