


ALUMINIUM PROFILE & ACCESSORIES PRODUCT CATALOG



OUR SERVICES

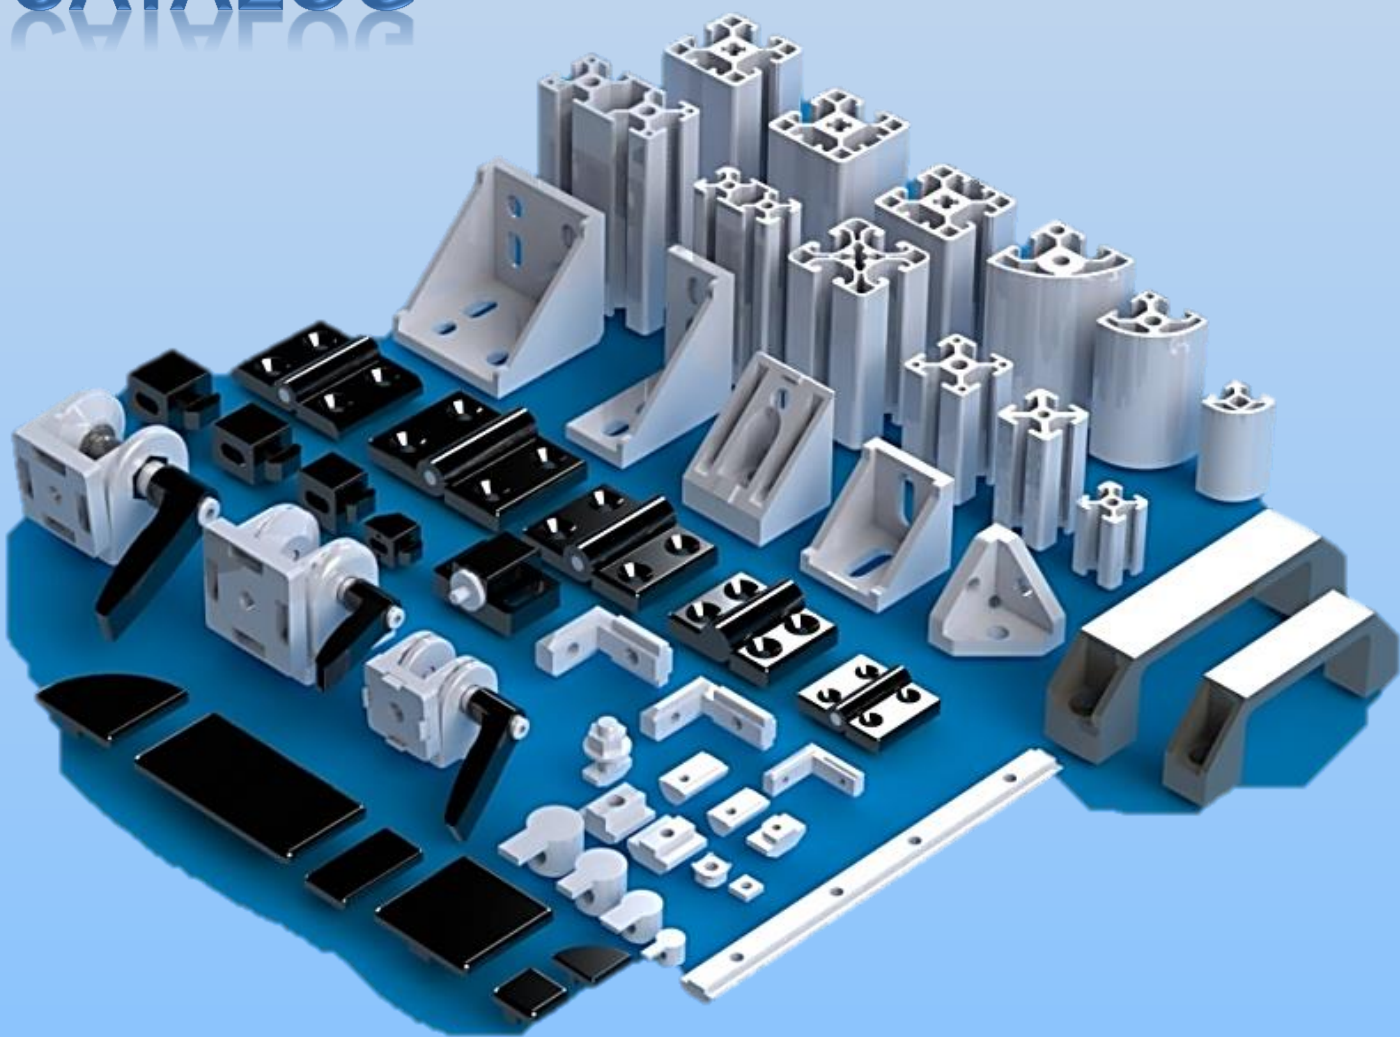

DESIGN SERVICE

All of our engineers are well trained and have many experiences in the construction of aluminium profile systems. We are able to meet our customers specific application demands through the use of our in house CAD support service.

CUT TO LENGTH SERVICE






We provide our customers with a Cut Down service to satisfy specific length requirement. The advantages are the cross-section ends are burr free and do not need to be reworked


IN HOUSE & ON SITE ASSEMBLY SERVICES

With our experienced and trained technicians, and our fully equipped workshop on site, we are able to assemble efficiently to meet our customers high quality requirements




TABLE OF CONTENT

				
ALUMINIUM PROFILE	STANDARD FASTERER SET	BUTTON HEAD SCREW	UNIVERSAL JOINT SET	INTERIOR BRACKET
PAGE: 1-4	PAGE: 5	PAGE: 5	PAGE: 6	PAGE: 7
				
GUSSET ELEMENT	3 WAY CONNECTOR	PROFILE HAMMER HEAD	SLOT NUT	HALF ROUND NUT
PAGE: 8-10	PAGE: 11	PAGE: 11	PAGE: 12	PAGE: 13
				
RHOMBUS NUT	HINGE	MAGNETIC LOCK	TOOL HANGER	FLOOR BRACKET
PAGE: 14	PAGE: 15-16	PAGE: 17	PAGE: 17	PAGE: 17
				
MULTI BLOCK	END CAP	UNIVERSAL HANDLE	JOINT CONNECTOR	SWIVEL JOINT
PAGE: 18	PAGE: 19	PAGE: 19	PAGE: 20	PAGE: 21
				
FOOT MOUNTING	CASTOR WHEEL			
PAGE: 22	PAGE: 23-28			

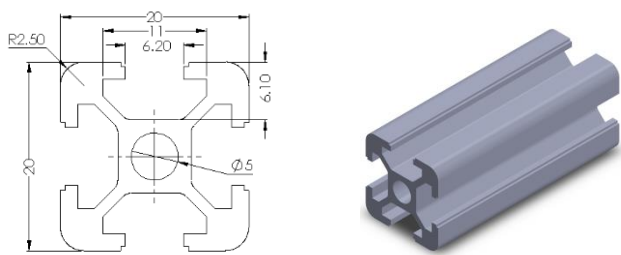


❑ LIMA2020-6

Material	Aluminium 6063-T5
Weight	0.465kg/m
Length	6100mm

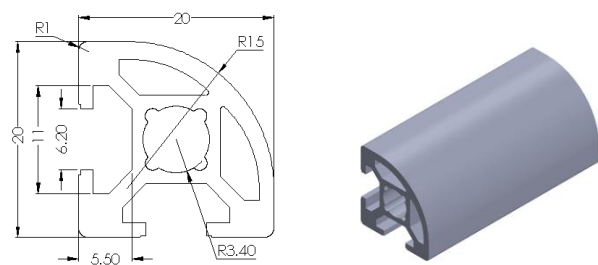


❑ LIMA2020CR-6

Material	Aluminium 6063-T5
Weight	0.448kg/m
Length	5000mm

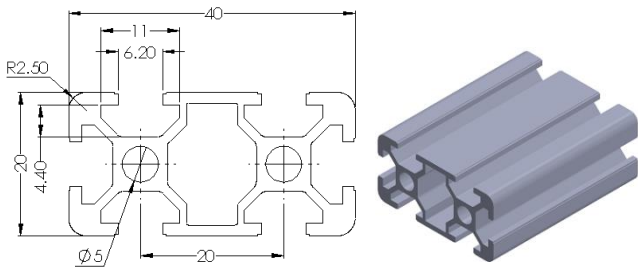


❑ LIMA2040-6

Material	Aluminium 6063-T5
Weight	0.808kg/m
Length	6100mm

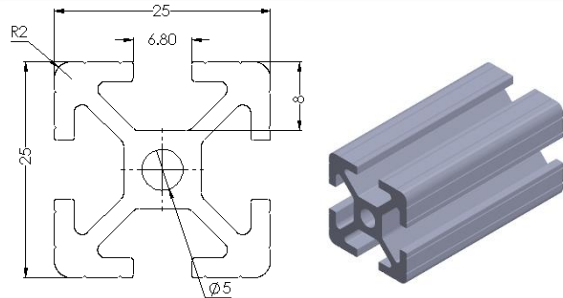


❑ LIMA2525-6

Material	Aluminium 6063-T5
Weight	0.825kg/m
Length	5080mm

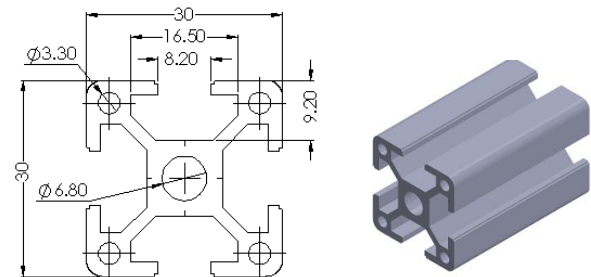



❑ LIMA3030-8

Material	Aluminium 6063-T5
Weight	0.938kg/m
Length	6100mm

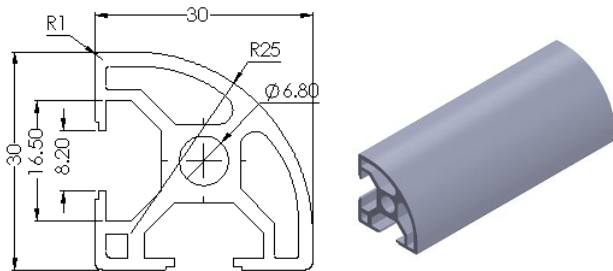



❑ LIMA3030CR-8

Material	Aluminium 6063-T5
Weight	0.938kg/m
Length	6100mm

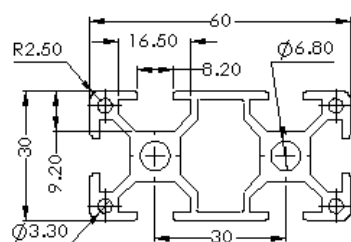



□ LIMA3060-8

Material	Aluminium 6063-T5
Weight	1.832kg/m
Length	6100mm





□ LIMA4040H-8

Material	Aluminium 6063-T5
Weight	1.885kg/m
Length	6100mm





□ LIMA4040L-8

Material	Aluminium 6063-T5
Weight	1.355kg/m
Length	6100mm





□ LIMA4040CR-8

Material	Aluminium 6063-T5
Weight	0.95kg/m
Length	5000mm




□ LIMA4040L3S-8

Material	Aluminium 6063-T5
Weight	1.48kg/m
Length	5000mm




□ LIMA4040L2SA-8

Material	Aluminium 6063-T5
Weight	1.51kg/m
Length	5000mm

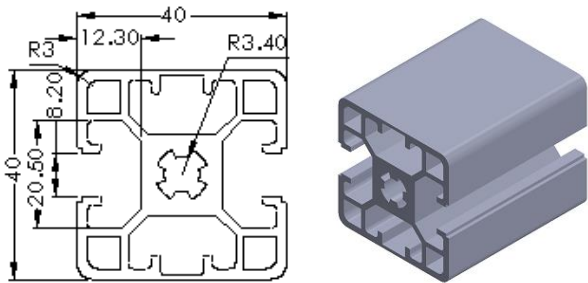


❑ LIMA4040L2S0-8

Material	Aluminium 6063-T5
Weight	1.355kg/m
Length	6100mm

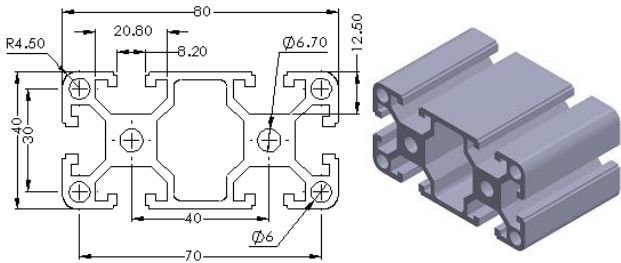


❑ LIMA4080-8

Material	Aluminium 6063-T5
Weight	3.77kg/m
Length	6100mm

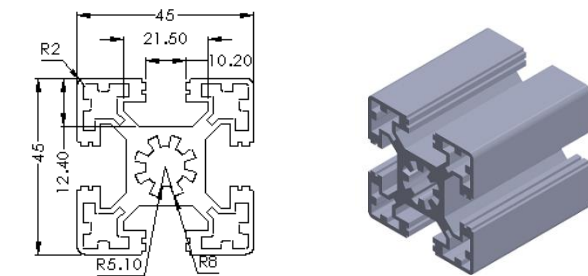


❑ LIMA4545-10

Material	Aluminium 6063-T5
Weight	2.36kg/m
Length	6100mm

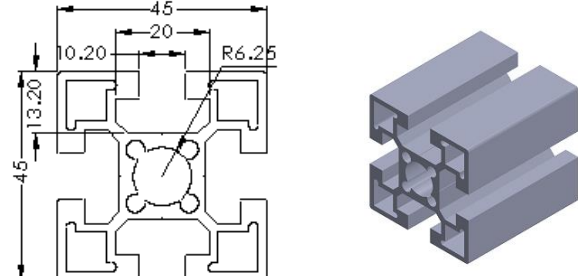


❑ LIMA4545-HFS

Material	Aluminium 6063-T5
Weight	1.95kg/m
Length	6100mm

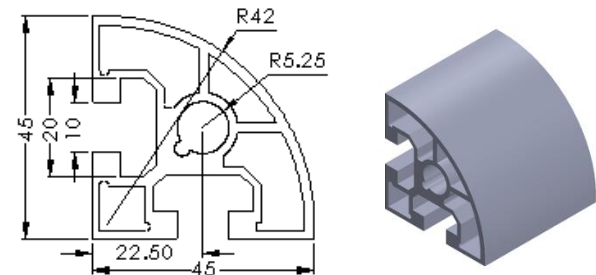


❑ LIMA4545CR-10

Material	Aluminium 6063-T5
Weight	1.75kg/m
Length	5000mm

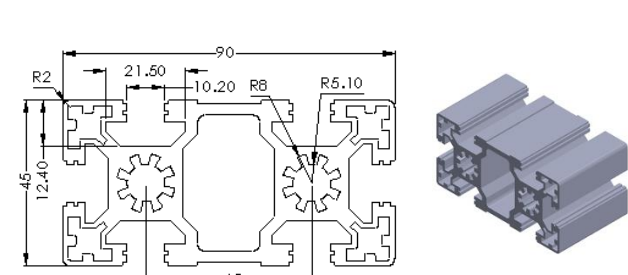


❑ LIMA4590-10

Material	Aluminium 6063-T5
Weight	4.11kg/m
Length	6100mm

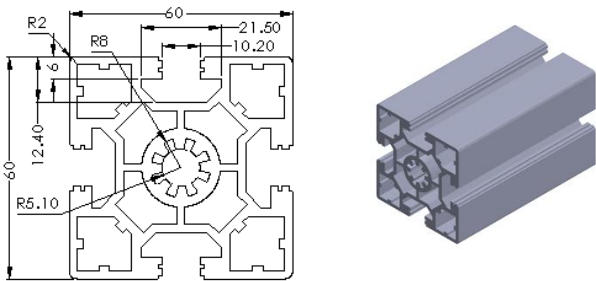


□ LIMA6060-10

Material	Aluminium 6063-T5
Weight	4.08kg/m
Length	5000mm

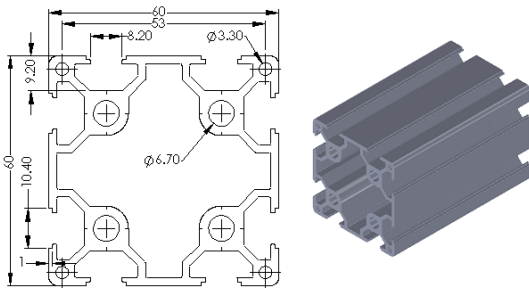


□ LIMA6060-8

Material	Aluminium 6063-T5
Weight	2.604kg/m
Length	5000mm

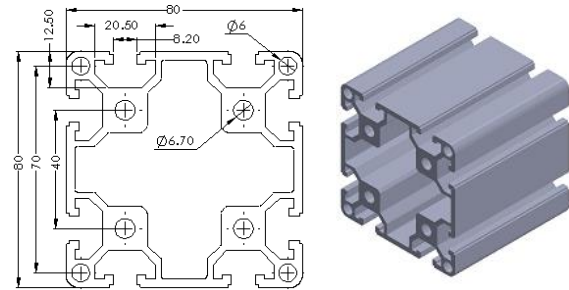

□ LIMA8080-8


Material	Aluminium 6063-T5
Weight	5.36kg/m
Length	6100mm

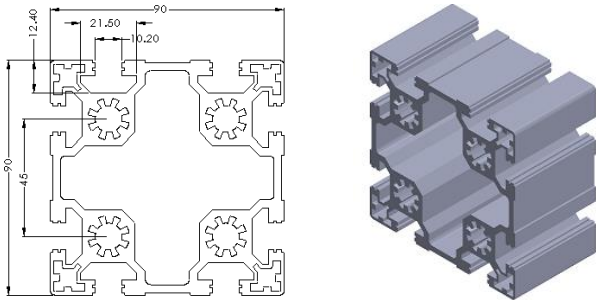

□ LIMA9090-10

Material	Aluminium 6063-T5
Weight	6.32kg/m
Length	6100mm



STANDARD FASTENER SET

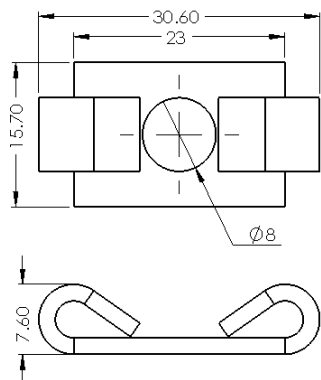

□ LIMA-STJ8-8/3030

Material: Zinc Plated Steel


Used together with button head Screw M8x20 for **LIMA3030-8**, **LIMA3060-8** AND **LIMA6060-8**

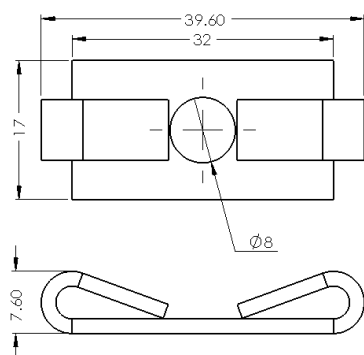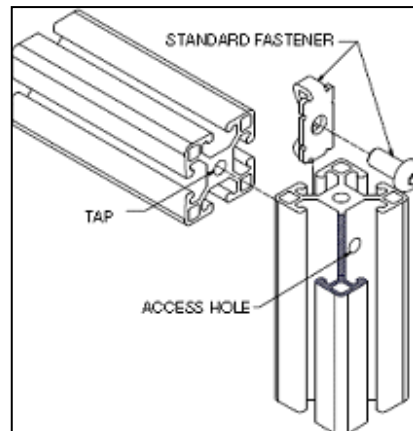


□ LIMA-STJ8-8/34040

Material: Zinc Plated Steel

Used together with button head Screw M8x30 for **LIMA4040-8**, **LIMA4080-8** AND **LIMA8080-8**

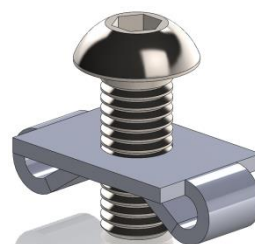


BUTTON HEAD SCREW

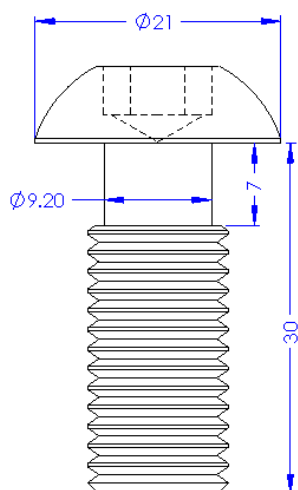


□ LIMA-BH 12X30

For simple, right angle and power lock connection.


Used for **LIMA-4545-10**, **LIMA-6060-10** & **LIMA-9090-10** Series profile

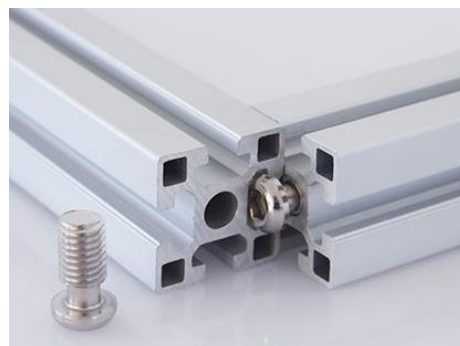


UNIVERSAL JOINT SET

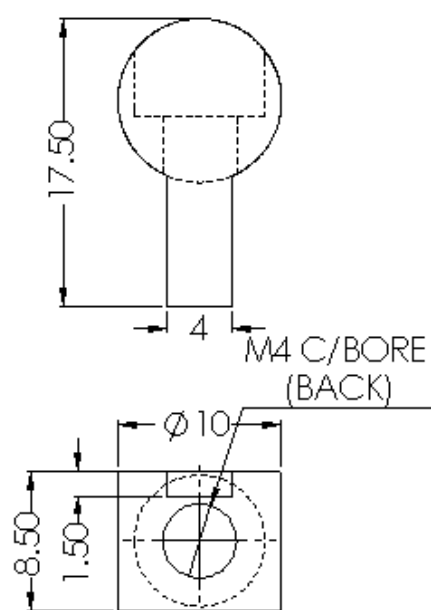


❑ LIMA-UJT2020

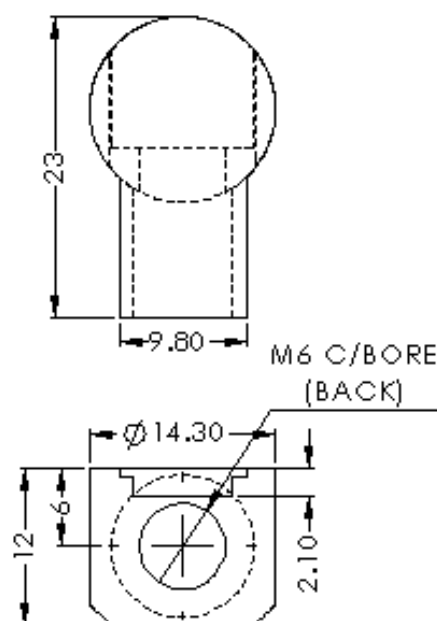

❑ LIMA-UJT3030

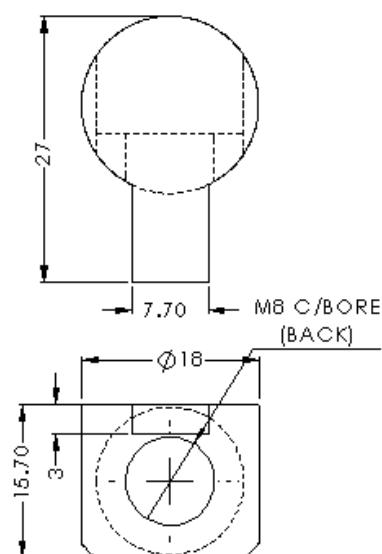

❑ LIMA-UJT4040

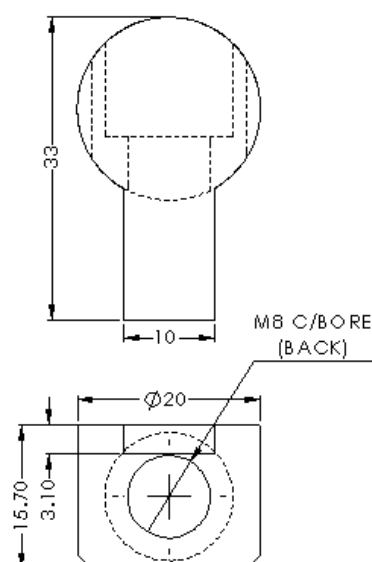



❑ LIMA-UJT4545

Material: Casted GD-Zn

Suitable for profiles need to be moved frequently.

- LIMA-UJT2020 used with cap screw **M4x16** and half round nut **LIMA-HRN4-6/2020**.
- LIMA-UJT3030 used with cap screw **M6x25** and half round nut **LIMA-HRN6-8/3030**
- LIMA-UJT4040 used with cap screw **M8x30** and half round nut **LIMA-HRN8-8/4040**
- LIMA-UJT4545 used with cap screw **M8x30** and half round nut **LIMA-HRN8-10/4545**

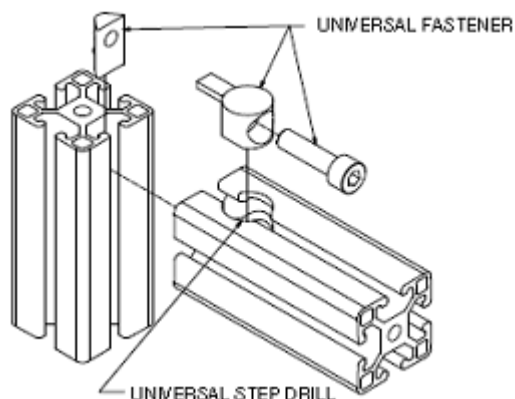


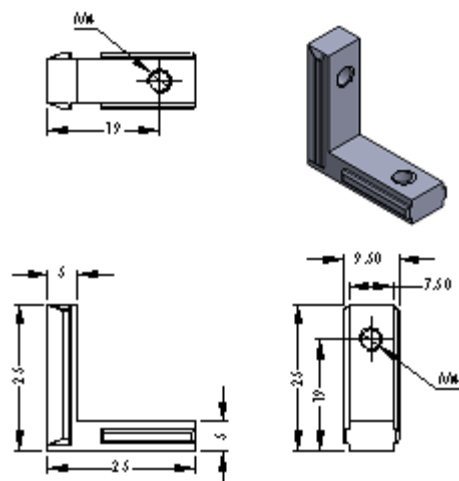

❑ LIMA-IB2020

Material: Zinc Plated Carbon Steel


Used for **LIMA2020-6** or **LIMA2040-6** in right angle connection with M4 set screw

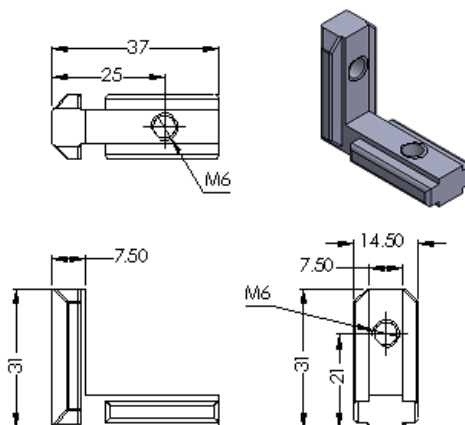

❑ LIMA-IB3030/4040

Material: Zinc Plated Carbon Steel


Used for **LIMA3030-8**, **LIMA3060-8**, **LIMA6060-8**, **LIMA4040-8**, **LIMA4080-8**, **LIMA8080-8** in right angle connection with M6 set screw

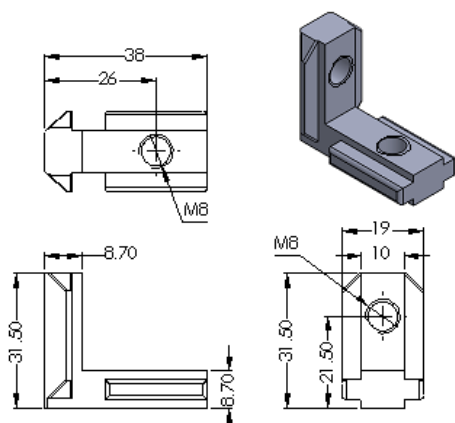


❑ LIMA-IB4545

Material: Zinc Plated Carbon Steel

Used for **LIMA4545-10**, **LIMA4590-10**, **LIMA6060-10** or **LIMA9090-10**, in right angle connection with M8 set screw

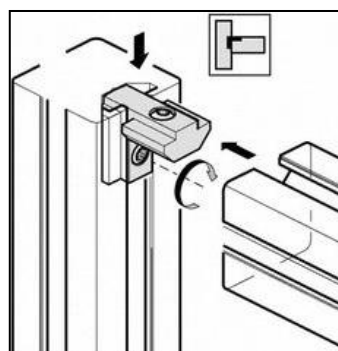


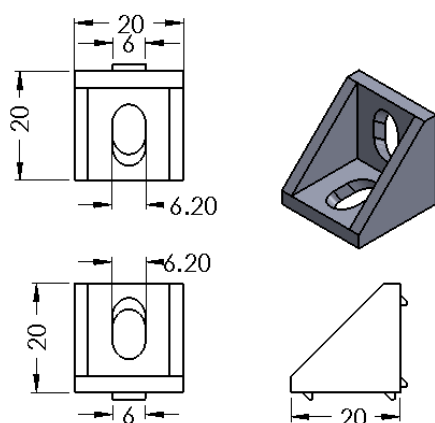

□ LIMA-GE20X20-6

Material: Die Casted Aluminium


Used for **LIMA2020-6** or **LIMA2040-6** in right angle connection. Used with button head screw **M5x10** and half round nut **LIMA-HRN5-6/2020**

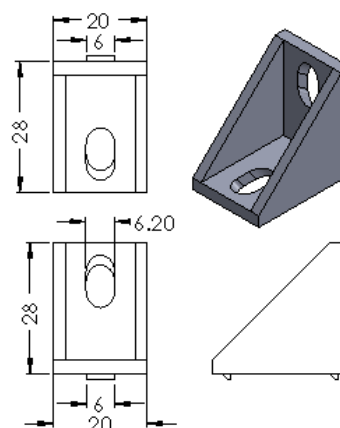

□ LIMA-GE20X28-6

Material: Die Casted Aluminium


Used for **LIMA2020-6** or **LIMA2040-6** in right angle connection. Used with button head screw **M5x10** and half round nut **LIMA-HRN5-6/2020**

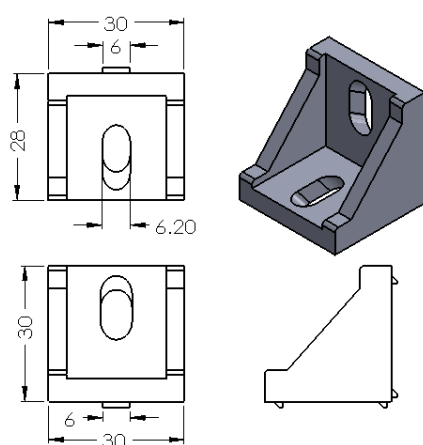

□ LIMA-GE30X30-8

Material: Die Casted Aluminium


Used for **LIMA3030-8**, **LIMA3060-8** or **LIMA6060-8** in right angle connection. Used with button head screw **M6x12** and half round nut **LIMA-HRN6-8/3030**

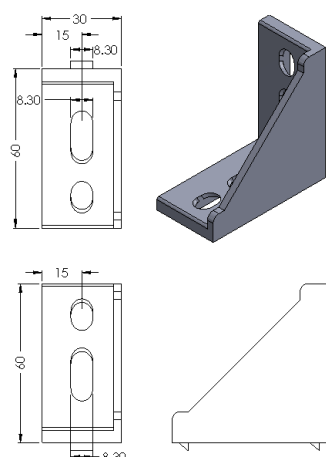

□ LIMA-GE30X60-8

Material: Die Casted Aluminium


Used for **LIMA3030-8**, **LIMA3060-8** or **LIMA6060-8** in right angle connection. Used with cap screw **M6x12** and half round nut **LIMA-HRN6-8/3030**

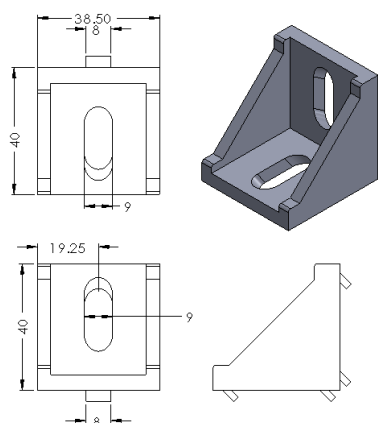

□ LIMA-GE40X40-8

Material: Die Casted Aluminium


Used for **LIMA4040-8, LIMA-4080-8** or **LIMA8080-8** in right angle connection. Used with cap screw **M8x16** and half round nut **LIMA-HRN8-8/4040**

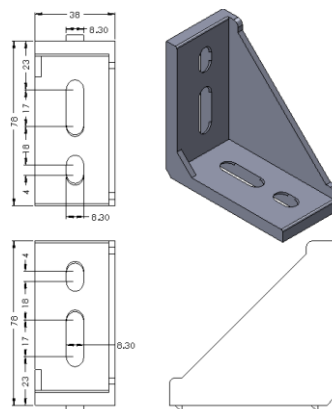

□ LIMA-GE40X80-8

Material: Die Casted Aluminium


Used for **LIMA4040-8, LIMA4080-8** or **LIMA8080-8** in right angle connection. Used with cap screw **M8x16** and half round nut **LIMA-HRN8-8/4040**

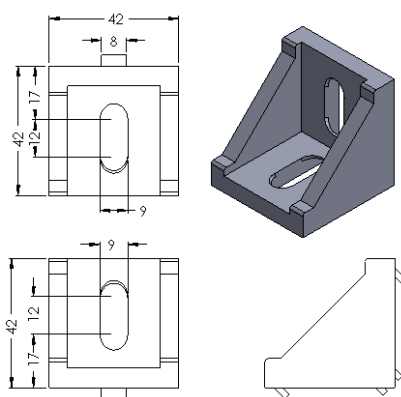

□ LIMA-GE42X42-10

Material: Die Casted Aluminium


Used for **LIMA4545-10, LIMA4590-10, LIMA6060-10** or **LIMA9090-10** in right angle connection. Used with cap screw **M8x20** and half round nut **LIMA-HRN8-10/4545**

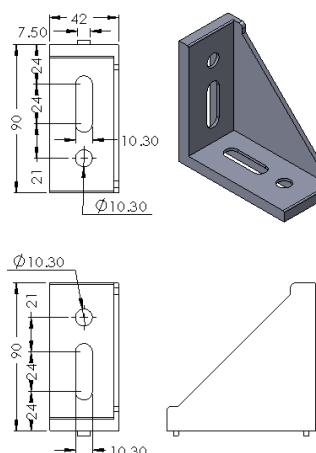

□ LIMA-GE42X88-10

Material: Die Casted Aluminium


Used for **LIMA4545-10, LIMA4590-10, LIMA6060-10, LIMA4590-10** in right angle connection. Used with cap **M8x20** and half round nut **LIMA-HRN8-10/4545**

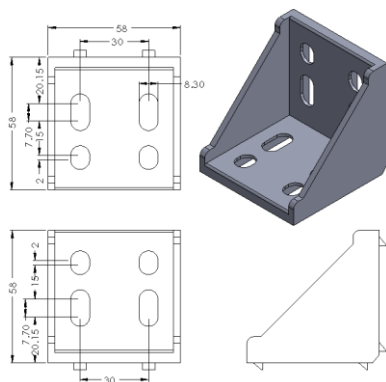

□ LIMA-GE60X60-8

Material: Die Casted Aluminium


Used for **LIMA3060-8** or **LIMA6060-8** in right angle connection. Used with cap screw **M6x12** and half round nut **LIMA-HRN6-8/3030**

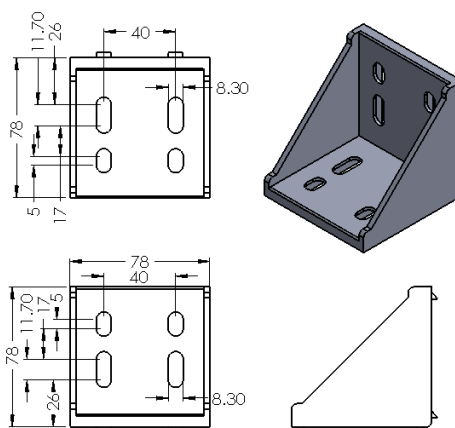

□ LIMA-GE80x80-8

Material: Die Casted Aluminium

Used for **LIMA4080-8** or **LIMA-8080-8** in right angle connection. Used with cap screw **Mx16** and half round nut **LIMA-HRN8-8/4040**

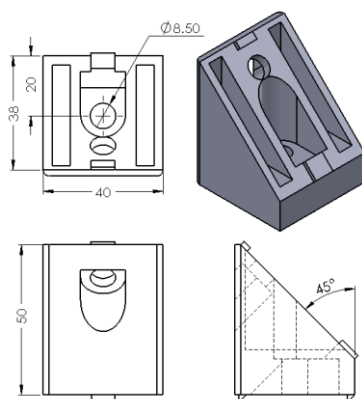


□ LIMA-45GE40X40-8

Material: Die Casted Aluminium

For 45 degree connection. Used with button head screw **M8x30** for profile **LIMA4040-8** & **LIMA4080-8**



3 WAY CONNECTOR

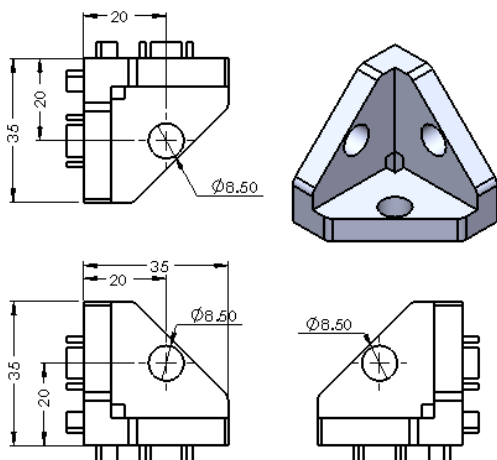


❑ LIMA-3WC40X40-8

Material: Die Casted Aluminium

Used for **LIMA4040-8** profile


PROFILE HAMMER HEAD

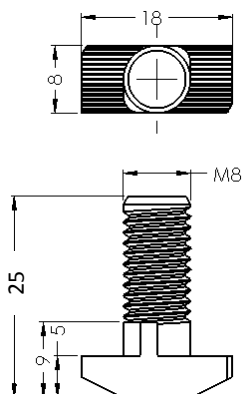

❑ LIMA-HH8X20-8

Material: Zinc Plated Steel

Slot 8 threaded cutting screw with **M8** flange nut size 13. Used for **LIMA4040-8, LIMA4080-8** or **LIMA8080-8** series profile






❑ LIMA-HH8X25-10

Material: Zinc Plated Steel

Slot 8 threaded cutting screw with **M8** flange nut size 13. Used for **LIMA4545-10, LIMA4590-10, LIMA6060** or **LIMA9090-10** series profile



SLOT NUT

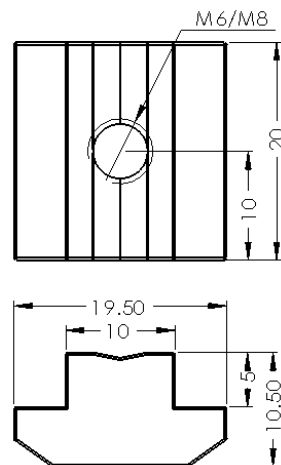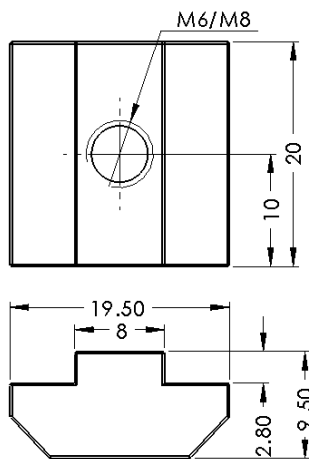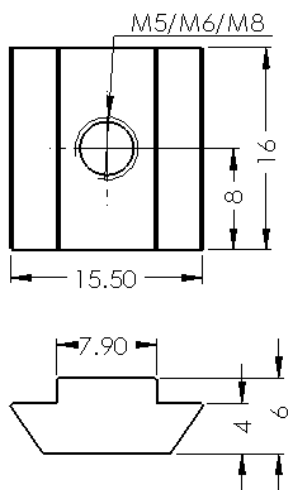

- ☐ LIMA-SLN5-8/3030
- ☐ LIMA-SLN6-8/3030
- ☐ LIMA-SLN8-8/3030

Use for LIMA3030-8, LIMA3060-8 or LIMA6060-8 profile

- ☐ LIMA-SLN6-8/4040
- ☐ LIMA-SLN8-8/4040


Use for LIMA4040-8, LIMA4080-8 or LIMA8080-8 profile


- ☐ LIMA-SLN6-10/4545
- ☐ LIMA-SLN8-10/4545

Use for LIMA4545-10, LIMA4590-10, LIMA6060-10 or LIMA9090-10 profile

Material: Zinc Plated Steel


Inserted into the profile slot to connect one profile to another.

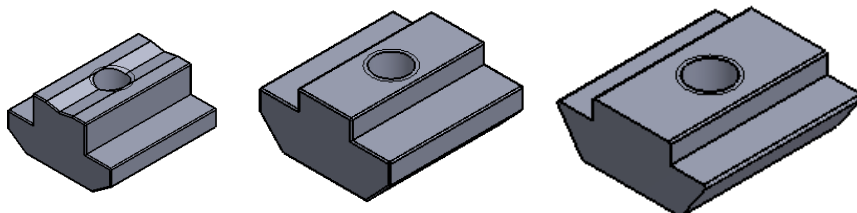

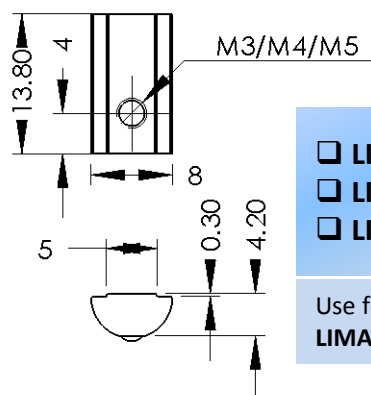


- ☐ LIMA-HRN3-6/2020
- ☐ LIMA-HRN4-6/2020
- ☐ LIMA-HRN5-6/2020

Use for LIMA2020-6 or LIMA2040-6 profile




- ☐ LIMA-HRN4-8/3030
- ☐ LIMA-HRN5-8/3030
- ☐ LIMA-HRN6-8/3030
- ☐ LIMA-HRN8-8/3030

Use for LIMA3030-8 or LIMA3060-8 profile

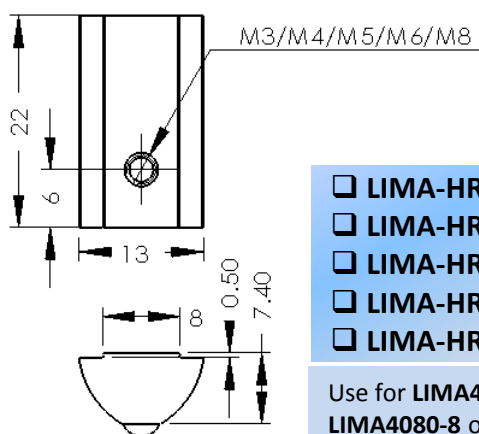


- ☐ LIMA-HRN3-8/4040
- ☐ LIMA-HRN4-8/4040
- ☐ LIMA-HRN5-8/4040
- ☐ LIMA-HRN6-8/4040
- ☐ LIMA-HRN8-8/4040

Use for LIMA4040-8, LIMA4080-8 or LIMA8080-8 profile

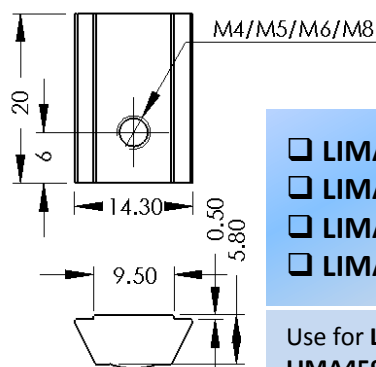

- ☐ LIMA-HRN4-10/4545
- ☐ LIMA-HRN5-10/4545
- ☐ LIMA-HRN6-10/4545
- ☐ LIMA-HRN8-10/4545

Use for LIMA4545-10, LIMA4590-10, LIMA6060-10 or LIMA9090-10 profile

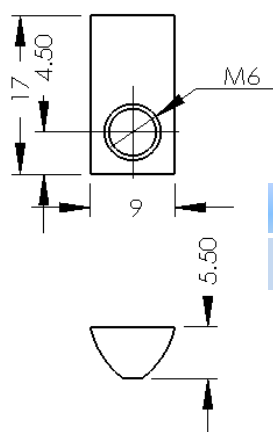


- ☐ LIMA-HRN6-6/2525


Use for LIMA2525-6 profile

Material: Zinc Plated Steel


Universally usable mounting element fits into the profile groove at any desired point by means of spring thrust piece

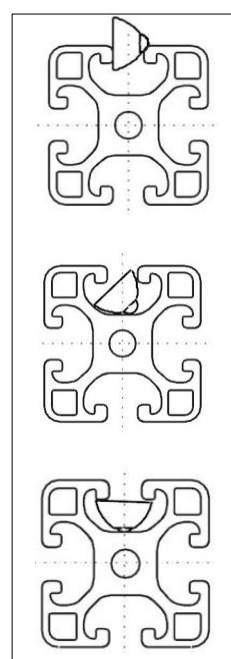


RHOMBUS NUT

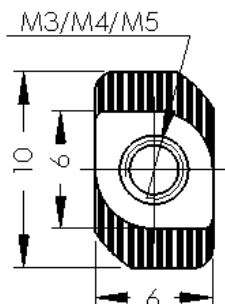


- ☐ LIMA-RN3-6/2020
- ☐ LIMA-RN4-6/2020
- ☐ LIMA-RN5-6/2020




Material: Zinc Plated Steel
Used for **LIMA2020-6** or **LIMA2040-6** profile only

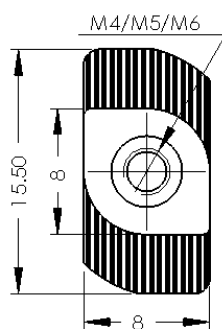


- ☐ LIMA-RN4-8/3030
- ☐ LIMA-RN5-8/3030
- ☐ LIMA-RN6-8/3030




Material: Zinc Plated Steel
Used for **LIMA3030-8**, **LIMA3060-8** or **LIMA6060-8** profile only

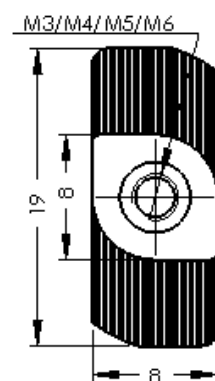


- ☐ LIMA-RN3-8/4040
- ☐ LIMA-RN4-8/4040
- ☐ LIMA-RN5-8/4040
- ☐ LIMA-RN6-8/4040




Material: Zinc Plated Steel
Used for **LIMA4040-8**, **LIMA4080-8** or **LIMA8080-8** profile only

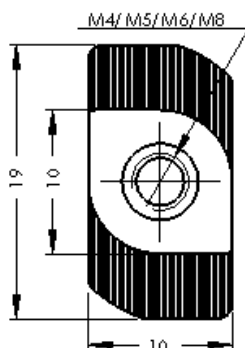


- ☐ LIMA-RN4-104545
- ☐ LIMA-RN5-104545
- ☐ LIMA-RN6-104545
- ☐ LIMA-RN8-104545



Material: Zinc Plated Steel
Used for **LIMA4545-10**, **LIMA4590-10**, **LIMA6060-10** or **LIMA9090-10** profile only

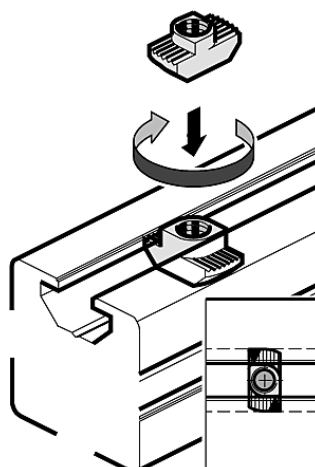

HINGE

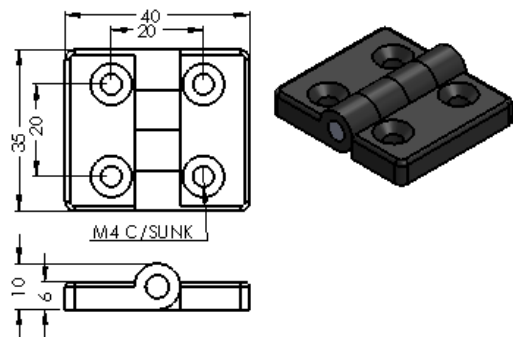


□ LIMA-H20X20-6

Material: Polyamide

Use for **LIMA2020-6** or **LIMA2040-6** profile.

Use with c/sunk screw **M4x8** and rhombus nut **LIMA-RN4-6/2020**

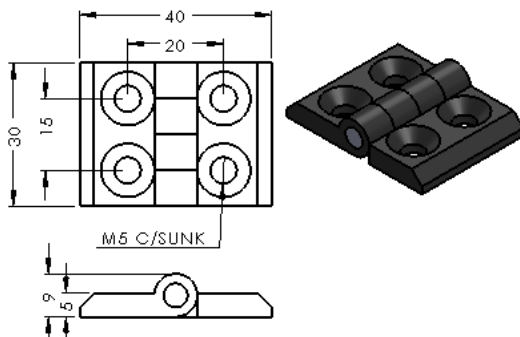


□ LIMA-HZC20X20-6

Material: Zinc (Black)

Use for **LIMA2020-6** or **LIMA2040-6** profile.

Use with c/sunk screw **M4x8** and rhombus nut **LIMA-RN4-6/2020**

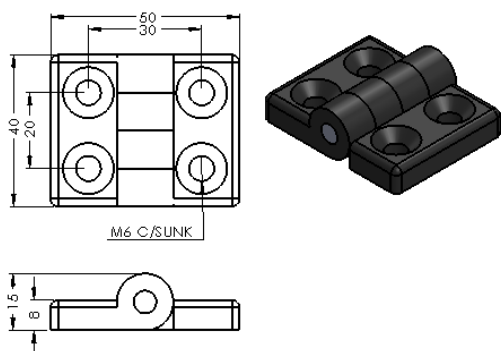


□ LIMA-H30X30-8

Material: Polyamide

Use for **LIMA3030-8**, **LIMA3060-8** or

LIMA6060-8 profile. Use with c/sunk screw **M6x16** and rhombus nut **LIMA-RN6-8/3030**

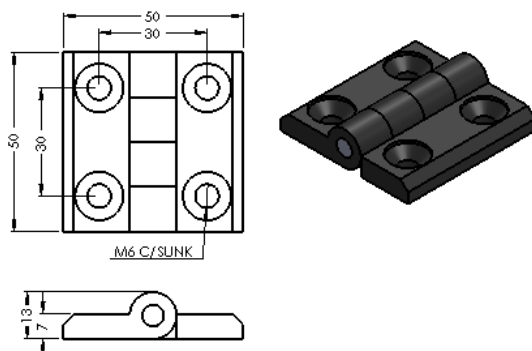


□ LIMA-HZC30X30-8

Material: Zinc (Black)

Use for **LIMA3030-8**, **LIMA3060-8** or

LIMA6060-8 profile. Use with c/sunk screw **M6x16** and rhombus nut **LIMA-RN6-8/3030**

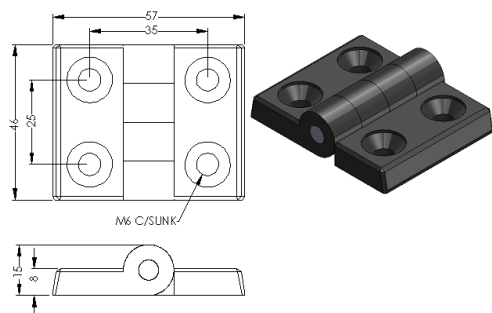


□ LIMA-H30X40-8

Material: Polyamide

Use for **LIMA3030-8** profile together with

LIMA4040H-8. Use with c/sunk screw **M6x16** and rhombus nut **LIMA-RN6-8/3030**

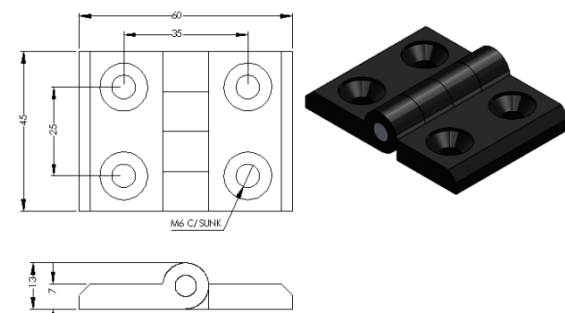


□ LIMA-HZC30X40-8

Material: Zinc(Black)

Use for **LIMA3030-8** profile together with


LIMA4040H-8. Use with c/sunk screw **M6x16** and rhombus nut **LIMA-RN6-8/3030**

HINGE

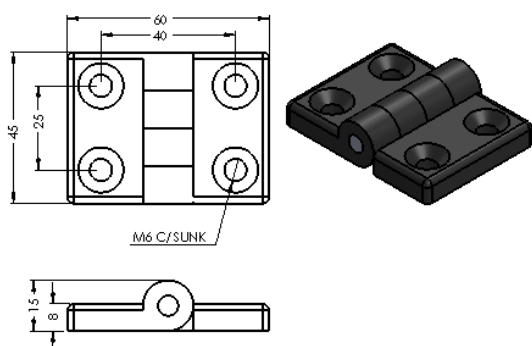


❑ LIMA-H40X40-8

Material: Polyamide
Use for **LIMA4040-8**, **LIMA4080-8** or **LIMA8080-8** profile. Use with c/sunk screw **M6x16** and rhombus nut **LIMA-RN6-8/4040**

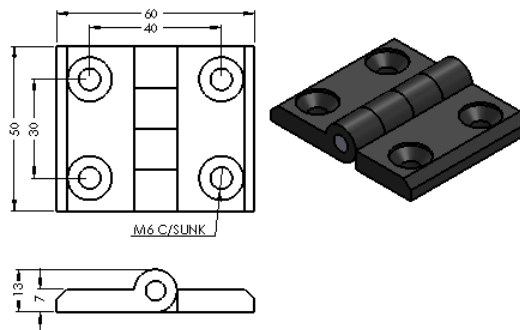


❑ LIMA-HZC40X40-8

Material: Zinc (Black)
Use for **LIMA4040-8**, **LIMA4080-8** or **LIMA8080-8** profile. Use with c/sunk screw **M6x16** and rhombus nut **LIMA-RN6-8/4040**

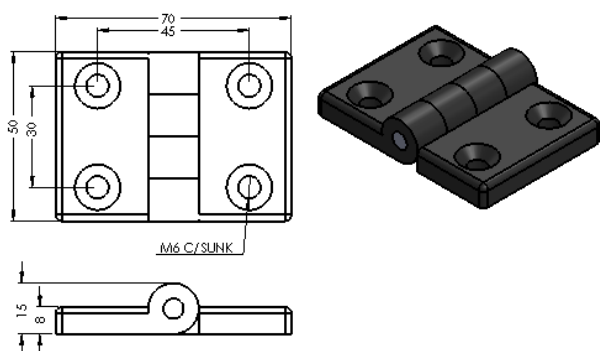


❑ LIMA-H45X45-10

Material: Polyamide
Use for **LIMA4545-10**, **LIMA4590-10** or **LIMA9090-10** profile. Use with c/sunk screw **M6x18** and rhombus nut **LIMA-RN6-10/4545**

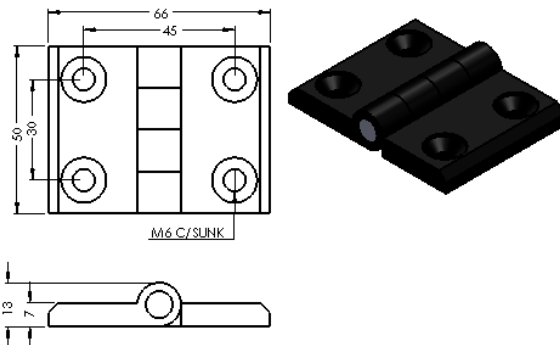


❑ LIMA-HZC45X45-8

Material: Zinc (Black)
Use for **LIMA4545-10**, **LIMA4590-10** or **LIMA9090-10** profile. Use with c/sunk screw **M6x18** and rhombus nut **LIMA-RN6-10/4545**

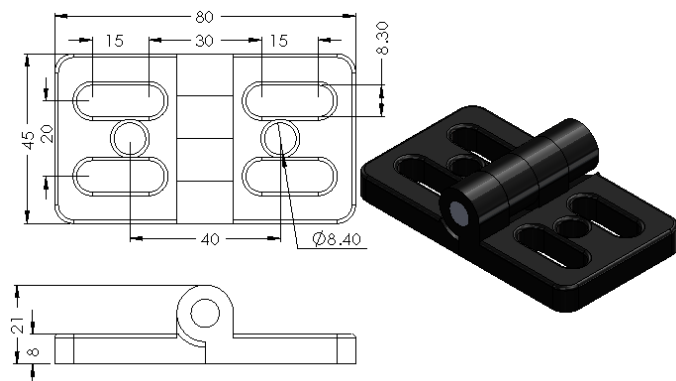


❑ LIMA-HZC60X60-10

Material: Zinc
Use for **LIMA6060-10**

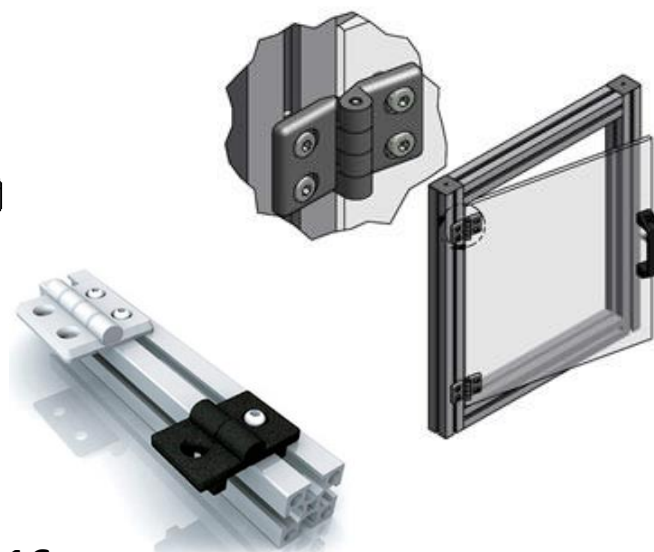

MAGNETIC LOCK

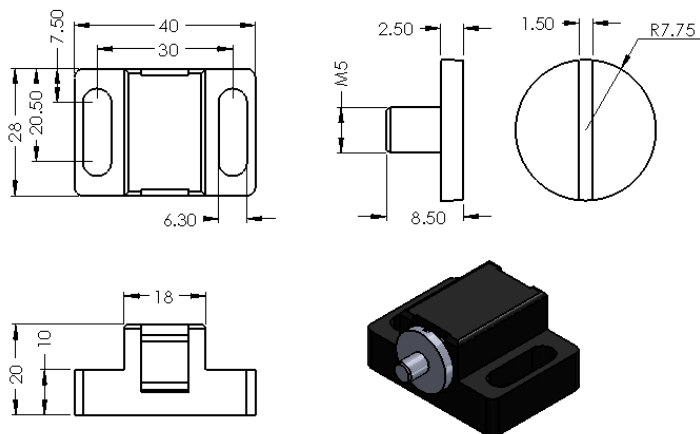


❑ LIMA-MGL-8

Material: Polyamide & Magnetic

Plastic case with **M5x6** head. Use to lock PVC/Polycarbonate door

TOOL HANGER


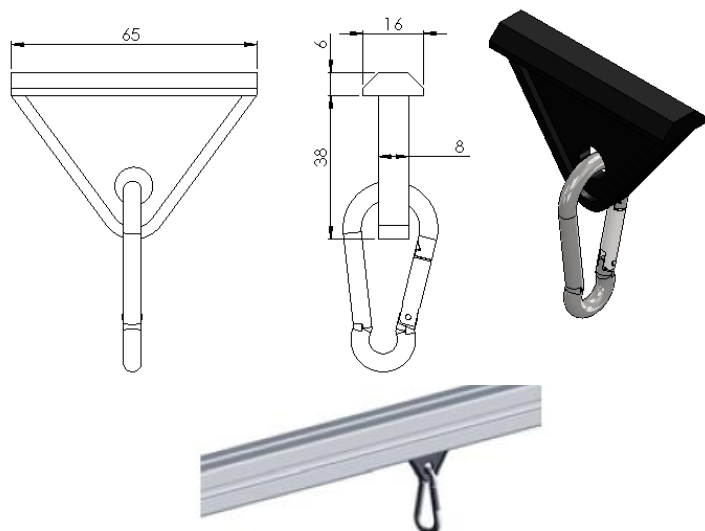


❑ LIMA-TH8/10

Material: Sliding part: ABS
Hook: Steel Zinc Plate

Use in **LIMA3030-8, LIMA3060-8, LIMA4040-8, LIMA4080-8, LIMA4545-10, LIMA4590-10, LIMA6060-10, LIMA9090-10**


FLOOR BRACKET

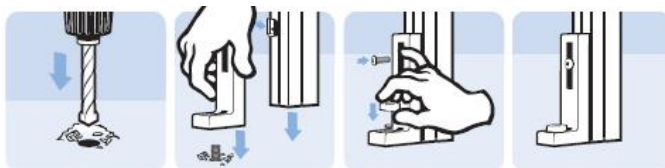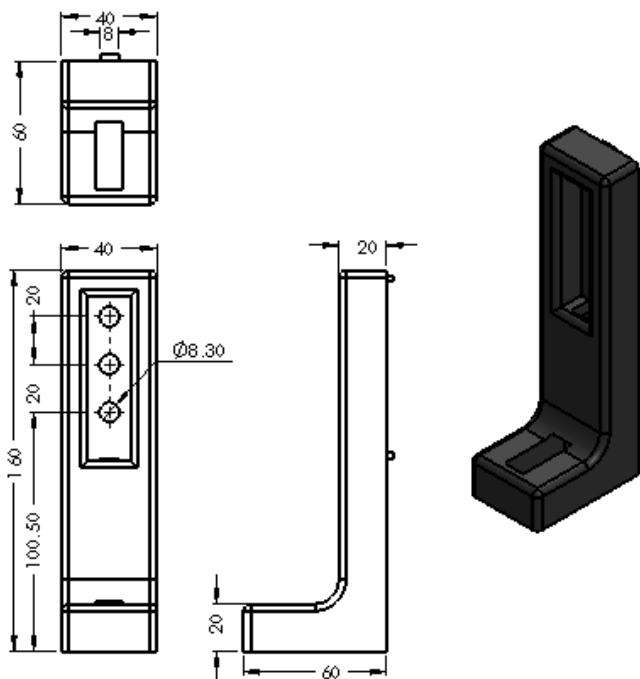

❑ LIMA-FB

Material: Die Casted Aluminium


Use to securely fixes aluminium profiles to the floor

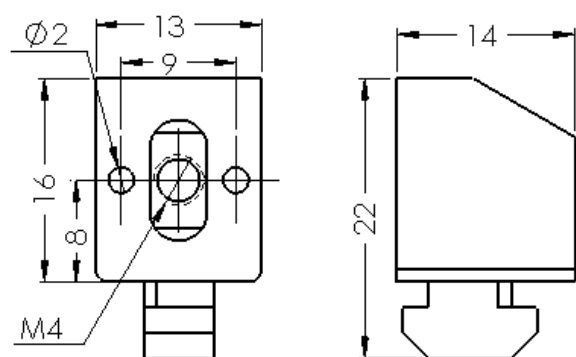

❑ LIMA-MB4-6/20X2

Material: Polyamide


Use for **LIMA2020-6** or **LIMA2040-6** profile

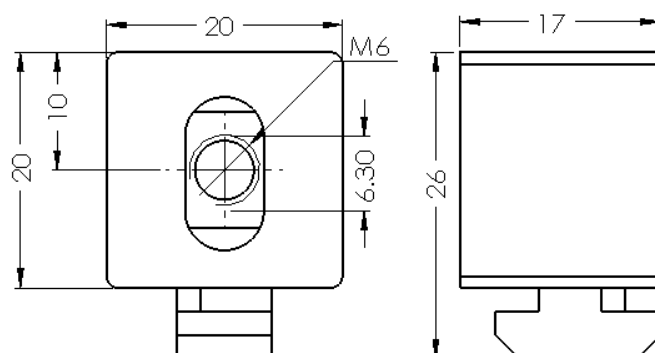

❑ LIMA-MB6-8/3030

Material: Polyamide


Use for **LIMA3030-8**, **LIMA3060-8** or **LIMA6060-8** profile

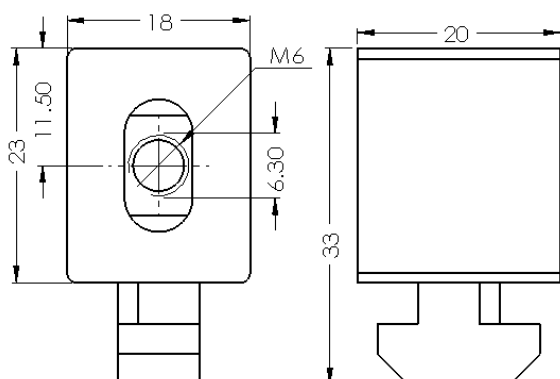

❑ LIMA-MB6-8/4040

Material: Polyamide



Use for **LIMA4040-8**, **LIMA4080-8** or **LIMA8080-8** profile

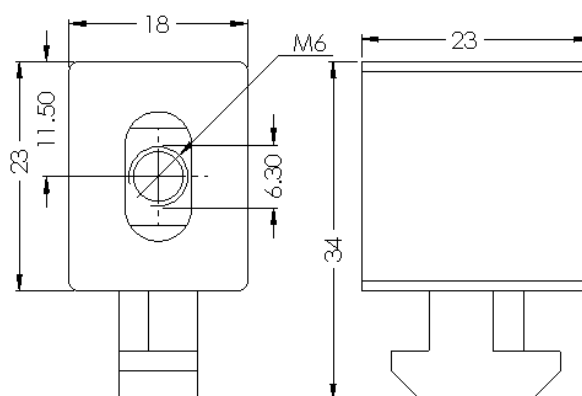

❑ LIMA-MB6-10/4545


Material: Polyamide

Use for **LIMA4545-10**, **LIMA4590-10**, **LIMA6060-10** or **LIMA9090-10** profile





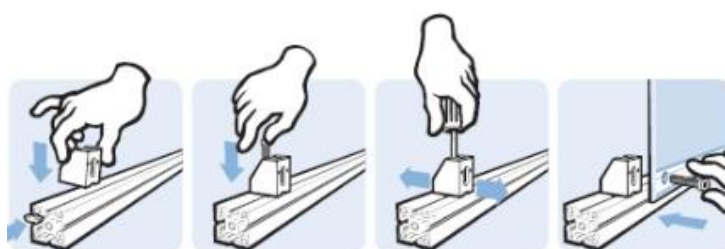
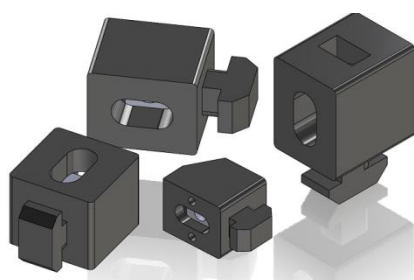


END CAP

- ☐ LIMA-EC20X20-6
- ☐ LIMA-EC20X20CR-6
- ☐ LIMA-EC20X40-6
- ☐ LIMA-EC30X30-8
- ☐ LIMA-EC30X30CR-8
- ☐ LIMA-EC30X60-8
- ☐ LIMA-EC40X40-8
- ☐ LIMA-EC40X40CR-8
- ☐ LIMA-EC40X80-8
- ☐ LIMA-EC45X45-10
- ☐ LIMA-EC45X45CR-10
- ☐ LIMA-EC45X90-10
- ☐ LIMA-EC60X60-10
- ☐ LIMA-EC60X60-8
- ☐ LIMA-EC80X80-8
- ☐ LIMA-EC90X90-10

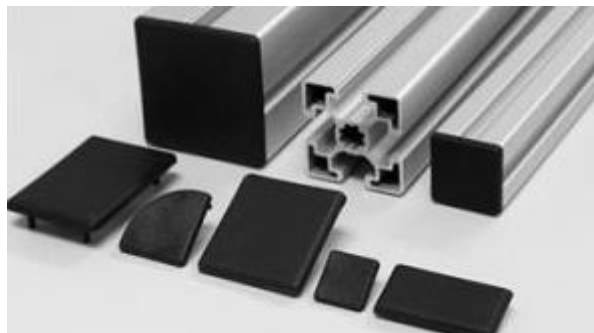

UNIVERSAL HANDLE

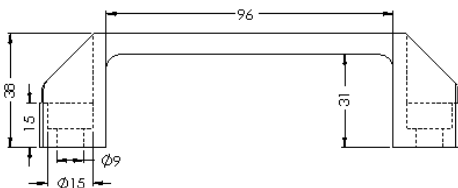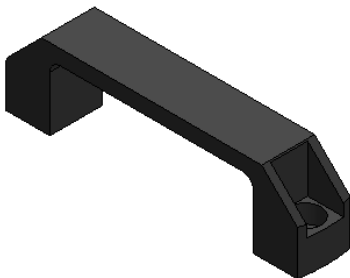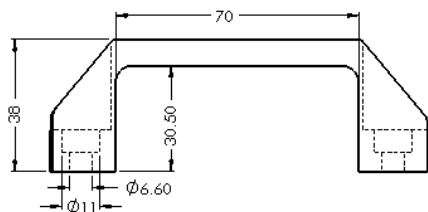

☐ LIMA-HANDLE-S


Material: Polyamide

Use for all profile


☐ LIMA-HANDLE-B

Material: Polyamide


Use for all profile

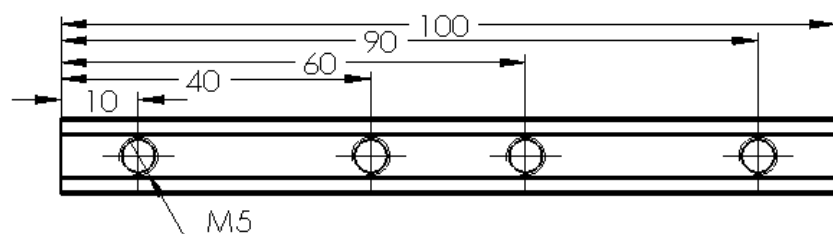


❑ LIMA-JC2020-6

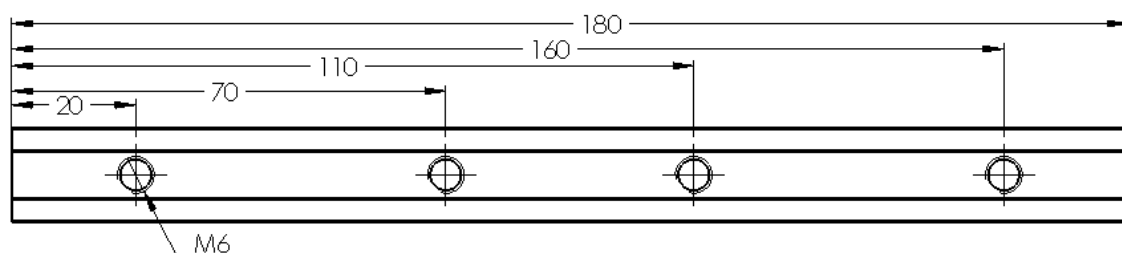

❑ LIMA-JC3030-8

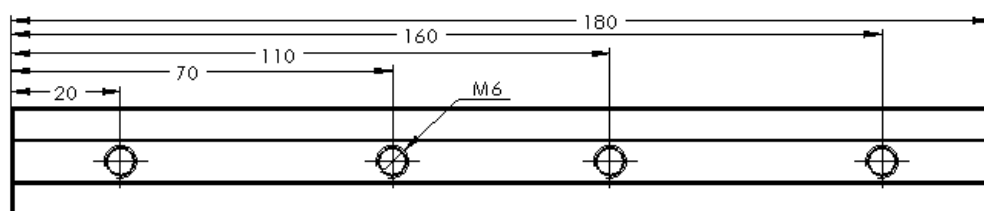

❑ LIMA-JC4040-8

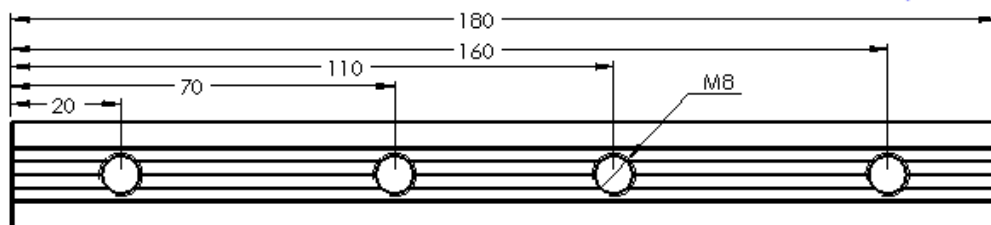

❑ LIMA-JC4545-10

❑ LIMA-JC2020

Material; Zinc Plated Steel.
Use for LIMA2020-6 &
LIMA2040-6

❑ LIMA-JC4040


Material; Zinc Plated Steel.
Use for LIMA4040-8,
LIMA4080-8, LIMA8080-8




❑ LIMA-JC3030

Material; Zinc Plated Steel.
Use for LIMA3030-8,
LIMA3060-8, LIMA6060-8

❑ LIMA-JC4545





Material; Zinc Plated Steel.
Use for LIMA4545-10,
LIMA4590-10, LIMA9090-10

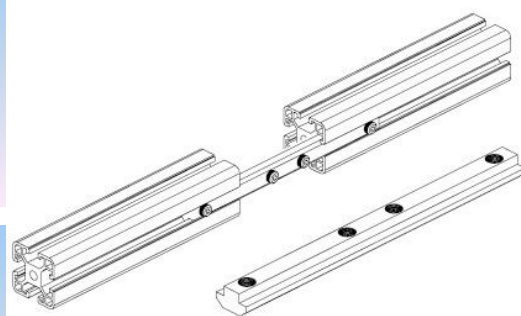

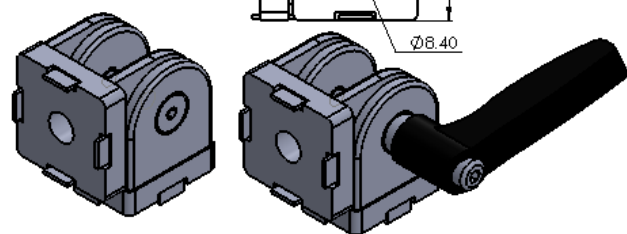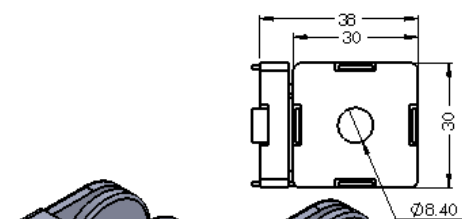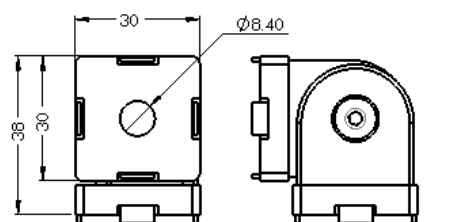




□ LIMA-SJ3030-8

□ LIMA-SJ3030H-8

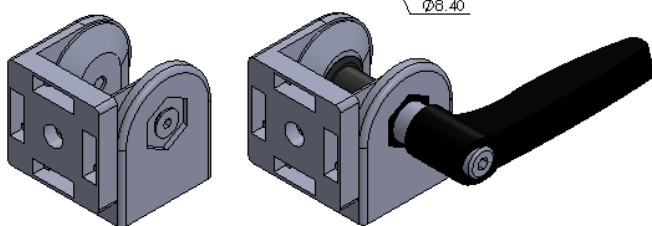

□ LIMA-SJ4040-8

□ LIMA-SJ4040H-8

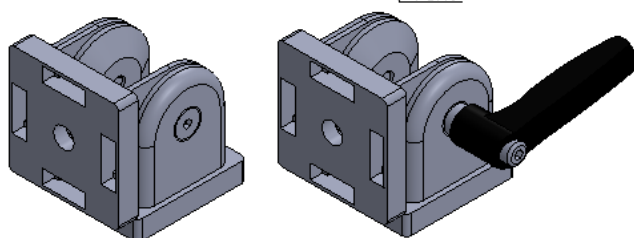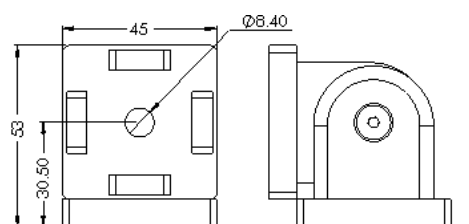


□ LIMA-SJ4545-8

□ LIMA-SJ4545H-8



Material: Die Casted Aluminium

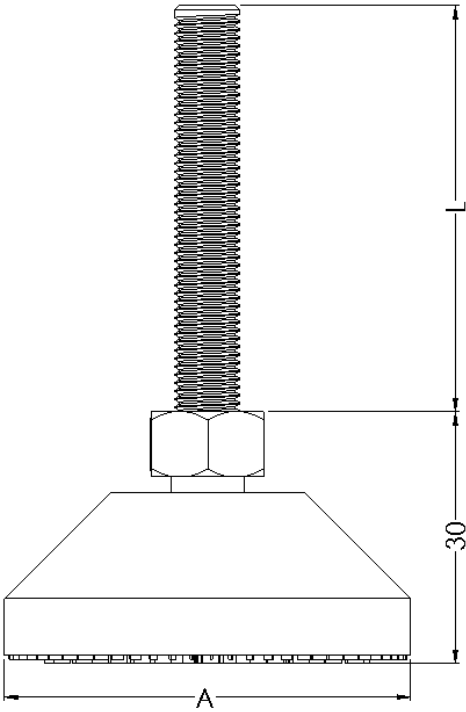


☐ SWIVEL TYPE



PART NO	THREAD	L	A
LIMA-FM40	M8	50	40
LIMA-FM50	M10	100	50
LIMA-FM80	M12	100	80

Material: Polyamide Foot Pad c/w
Zinc Plated Steel Thread & Nut

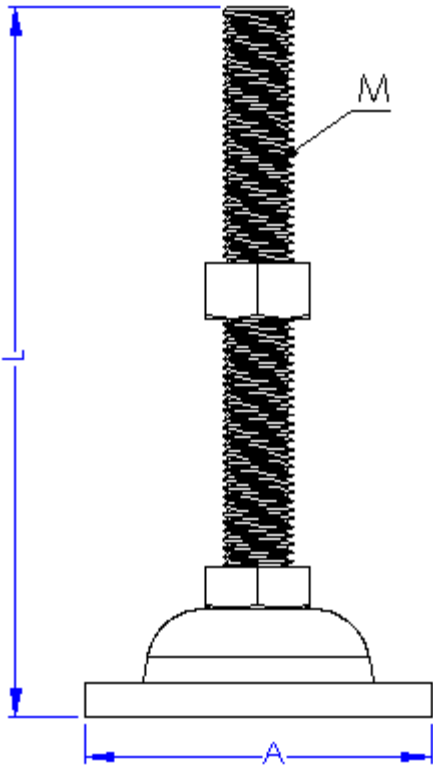

☐ NON-SLIP TYPE

PART NO	THRE AD	L	A
LA54M870B	M8	70	54
LA54M10110B	M10	110	54
LA54M12110B	M12	110	54
LA78M12165B	M12	165	78
LA78M16165B	M16	165	78



CARRYMASTER CASTOR WHEEL

AC-50

● LIGHT DUTY PURPOSE




AC-50F





AC-50S


- Max Load Capacity with 1 Caster - 55 Lbs.
- Recommended Load Capacity with 4 Casters - 220 Lbs.
- Unit Weight - F Type: 0.84 Lbs. ea.
S Type: 0.84 Lbs. ea.

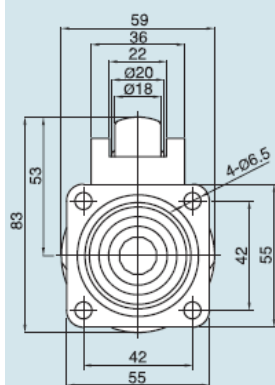

"F" Type

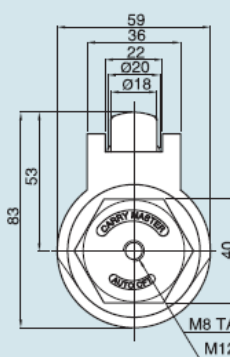

"S" Type



*Measurement in mm (Millimeter)

	Parts	Materials	Treatments
①	Top plate	SM45C	Zn Galvanized
②	Ball	STB2	Ni-Cr
③	Frame	ADC8	Powder Coated
④	Handle	NYLON-6	Red

	Parts	Materials	Treatments
⑤	Leveler(M-8)	SM45C	Zn Galvanized
⑥	Foot	*N.B.R.	Black
⑦	Pin	SM45C	Zn Galvanized
⑧	Wheel	NYLON-6	Black

*Urethane by order

CARRYMASTER CASTOR WHEEL

● LIGHT DUTY PURPOSE

AC-300




AC-300 F




AC-300 S

- Maximum Load Capacity with 1 Caster - 330 Lbs.
- Recommended Load Capacity with 4 Casters - 1,320 Lbs.
- Unit Weight - F Type: 1.67 Lbs. ea.
S Type: 1.67 Lbs. ea.

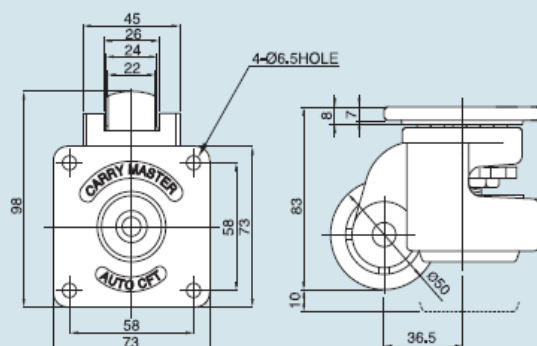

"F" Type

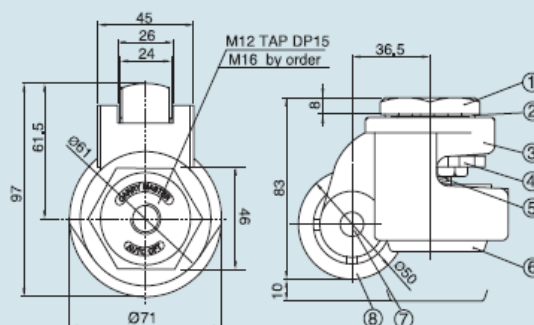

"S" Type

*Measurement in mm (Millimeter)

	Parts	Materials	Treatments
①	Top plate	SM45C	Zn Galvanized
②	Ball	STB2	Ni-Cr
③	Frame	ADC8	Powder Coated
④	Handle	NYLON-6	Red

	Parts	Materials	Treatments
⑤	Leveler(M-10)	SM45C	Zn Galvanized
⑥	Foot	*N.B.R.	Black
⑦	Pin	SM45C	Zn Galvanized
⑧	Wheel	NYLON-6	Black

*Urethane by order


CARRYMASTER CASTOR WHEEL

AC-600


MEDIUM DUTY PURPOSE



- Maximum Load Capacity with 1 Caster - 660 Lbs.
- Recommended Load Capacity with 4 Casters - 2,640 Lbs.
- Unit Weight - F Type: 3.04 Lbs. ea.
S Type: 2.46 Lbs. ea.



"F" Type

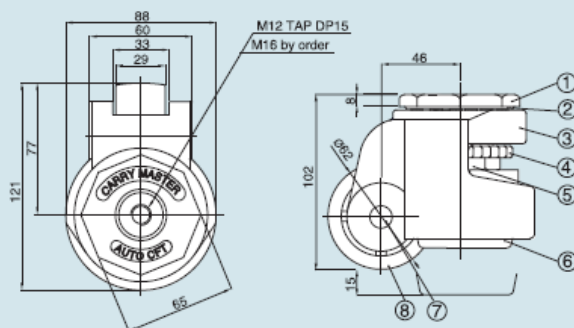

"S" Type

*Measurement in mm (Millimeter)

	Parts	Materials	Treatments
①	Top plate	SM45C	Zn Galvanized
②	Ball	STB2	Ni-Cr
③	Frame	ADC8	Powder Coated
④	Handle	NYLON-6	Red

	Parts	Materials	Treatments
⑤	Leveler(M-12)	SM45C	Zn Galvanized
⑥	Foot	*N.B.R.	Black
⑦	Pin	SM45C	Zn Galvanized
⑧	Wheel	NYLON-6	Black

*Urethane by order

CARRYMASTER CASTOR WHEEL

● MEDIUM DUTY PURPOSE


AC-1000




AC-1000 F

AC-1000 S

- Maximum Load Capacity with 1 Caster - 1,100 Lbs.
- Recommended Load Capacity with 4 Casters - 4,400 Lbs.
- Unit Weight - F Type: 4.01 Lbs. ea.
S Type: 3.43 Lbs. ea.

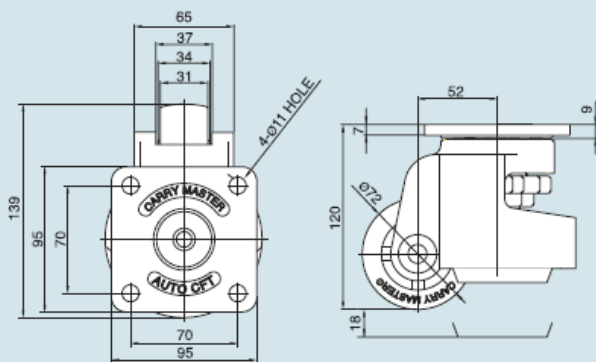

"F" Type

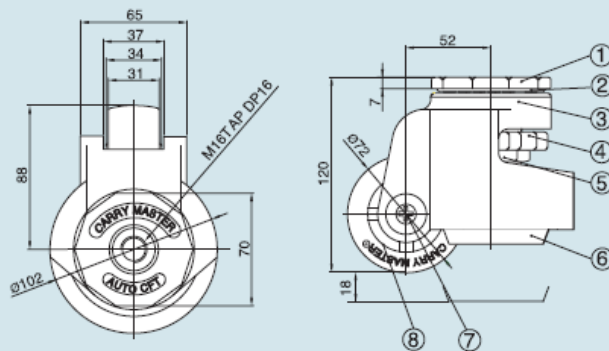

"S" Type

*Measurement in mm (Millimeter)

	Parts	Materials	Treatments
①	Top plate	SM45C	Zn Galvanized
②	Ball	STB2	Ni-Cr
③	Frame	ADC8	Powder Coated
④	Handle	NYLON-6	Red

	Parts	Materials	Treatments
⑤	Leveler(M-12)	SM45C	Zn Galvanized
⑥	Foot	*N.B.R.	Black
⑦	Pin	SM45C	Zn Galvanized
⑧	Wheel	NYLON-6	Black

*Urethane by order

AC-1300

MEDIUM DUTY PURPOSE




AC-1300F





AC-1300S


- Maximum Load Capacity with 1 Caster - 1,430 Lbs.
- Recommended Load Capacity with 4 Casters - 5,720 Lbs.
- Weight - F-Type 4.50 Lbs.
S-Type 4.00 Lbs.

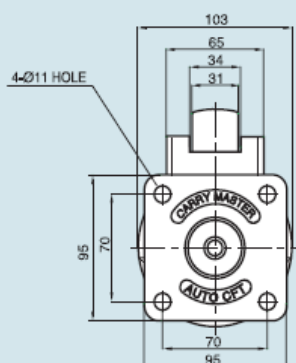

"F" Type

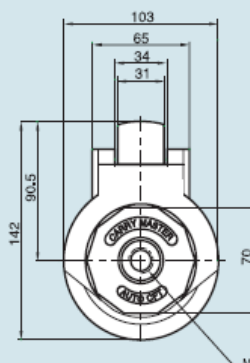

"S" Type



*Measurement in mm (Millimeter)

	Parts	Materials	Treatments
①	Top plate	SM45C	Zn Galvanized
②	Ball	STB2	Ni-Cr
③	Frame	ADC8	Powder Coated
④	Leveler (M-16)	SUS304	

	Parts	Materials	Treatments
⑤	Foot	ADC8	Black
⑥	Pin	SM45C	Zn Galvanized
⑦	Wheel	NYLON-6	Black

CARRYMASTER CASTOR WHEEL


● ULTRA HEAVY DUTY PURPOSE

AC-1800F




AC-1800F

- Maximum Load Capacity with 1 Caster - 1,984 Lbs.
- Recommended Load Capacity with 4 Casters - 7,920 Lbs.
- Weight - 11.88 Lbs.

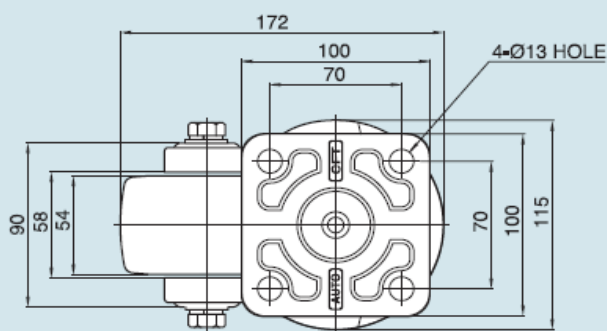

"F" Type

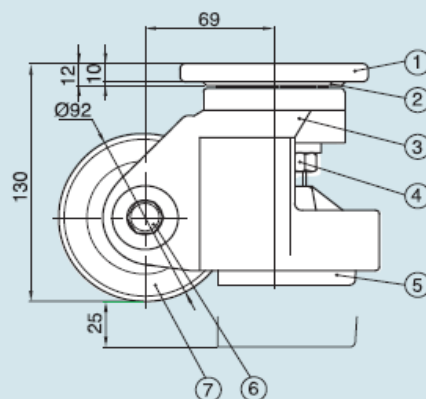

*Measurement in mm (Millimeter)

	Parts	Materials	Treatments
①	Top plate	SM45C	Zn Galvanized
②	Ball	STB2	Ni-Cr
③	Frame	GCD45	Powder Coated
④	Leveler (M-20)	SUS304	

	Parts	Materials	Treatments
⑤	Foot	ADC8	Black
⑥	Pin	SM45C	Zn Galvanized
⑦	Wheel	MC Nylon	Sky Blue

LETROMECC

LETROMECC INDUSTRIES (M) SDN BHD

33, Persiaran Mahsuri 1/1, Sunway Tunas,
11900 Bayan Lepas, Pulau Pinang,
Malaysia.

Tel : +604-644 4466 / +604-644 3741

Fax : +604-644 3749

Email: sales-pg@letromec.com

MAINLAND OFFICE

33, Jalan IKS, Bukit Tengah, Taman IKS,
14000 Bukit Mertajam, Penang,
Malaysia

Tel : +604-508 2188

Fax : +604-504 0149

Email: sales-pg@letromec.com

LETROMECC INDUSTRIES (KL) SDN BHD

No. 2A, Jalan MJ 14, Taman Industri Meranti Jaya,
47120 Puchong, Selangor,
Malaysia.

Tel : +603-8063 0270

Fax : +603-8063 0276

Email: sales-kl@letromec.com

LETROMECC INDUSTRIES (IPOH) SDN BHD

No. 14, Medan Bendahara 1, 31650 Ipoh,
Perak, Malaysia.

Tel : +605-254 8868

Fax : +605-254 7868

Email: sales-ipoh@letromec.com

LIMA TECHNOLOGIES (M) SDN BHD

No. 2A, Jalan MJ 14, Taman Industri Meranti Jaya,
47120 Puchong, Selangor,
Malaysia.

Tel : +603-8052 0929

Fax : +603-8052 6309

Email: limatechmsb@gmail.com

