




CPS 015 MINI Type


MATERIAL

- **Chain material :**
CPS-polyamide with glass fiber reinforced, UL94-HB
- **Low Noise :** 40 dB (DIN EN 61672-1)
- **Speed :** 10m / sec
- **Temperature :** -30°C ~ +130°C
- **Other installation Length**
Vertical curve above= max 0.8m
Vertical curve below= max 3.0m
Side Mounted, Unsupported= max 0.2m
- **Applications :** Printing Machine, Feeder unit
Count machine.
- **Load diagrams**
self-supporting length :

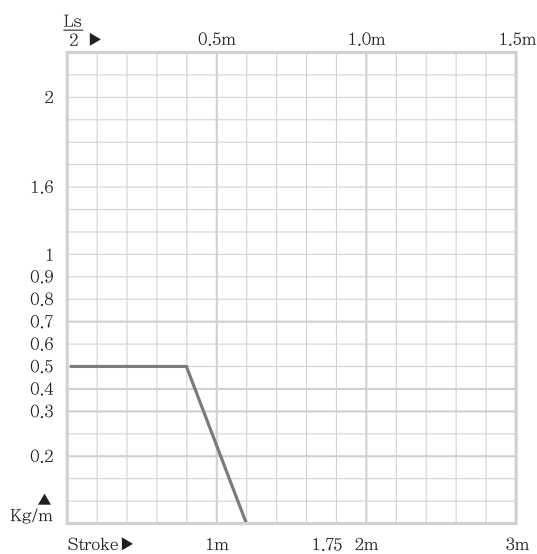

- **Calculation of the chain length**

$$\left[L = \frac{L_s}{2} + L_p \right]$$

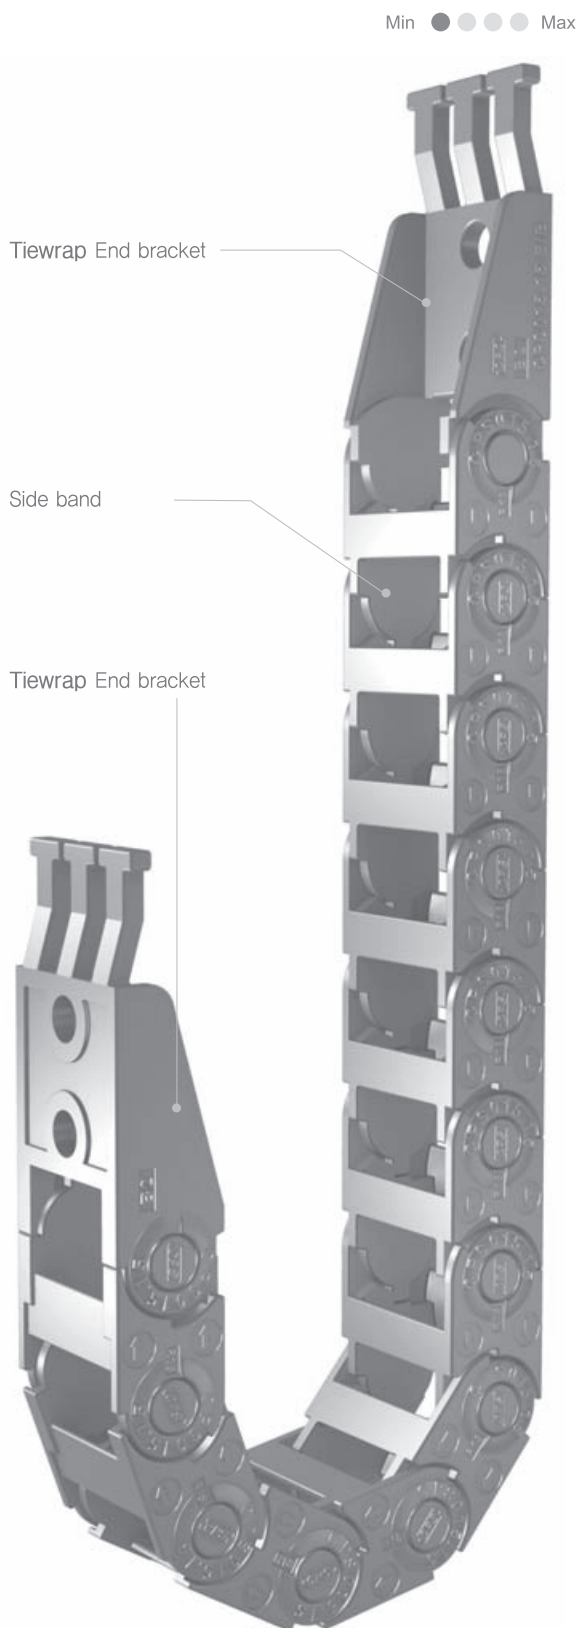




CPS CABLECHAIN



MINI Type CPS 015

LAYOUT OF THE CHAIN

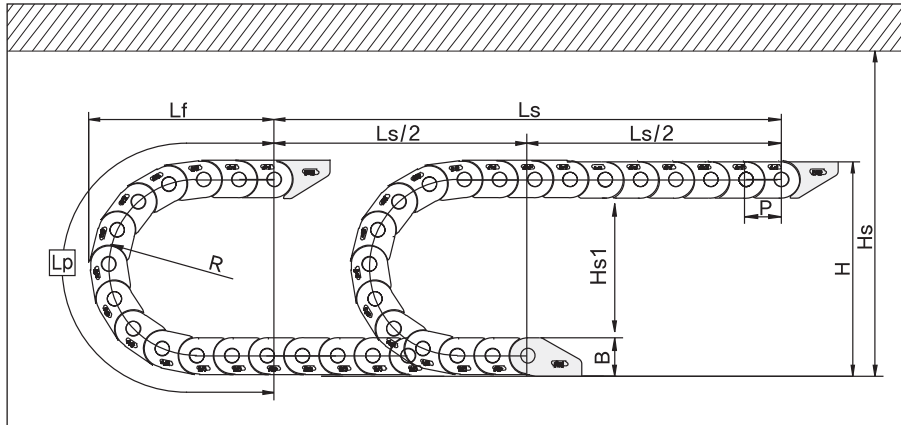

(Dimensions in mm)

Bending radius R	18	28	38
Lp	117	148	180
L f	55	65	75
H	49	69	89

Ls: Stroke

Lp: Loop Length

L f: Loop Projection

Hs: Safe Space

CPS 015 Type

Pitch P: 15mm

Height B: 13mm

Height H: $2R+B$ mm

$Hs \leq H+10$ mm

$Hs1 \leq -10$ mm

ORDERING (주문방법)


CPS 015 . 10. R28 / B₂ - 550L : 10ST




주문수량 Q' ty(set)
체인길이 Length(mm)
브라켓타입 Bracket Type (B1, B2, B3)
곡률반경 Bending Radius
내폭 Inside Width

CPS CABLE Chain


BRACKET TYPE (브라켓타입)



B1



B2




B3




CPS 015 MINI Type


CHAIN CROSS SECTION




CPS015.06 Type



CPS015.10 Type

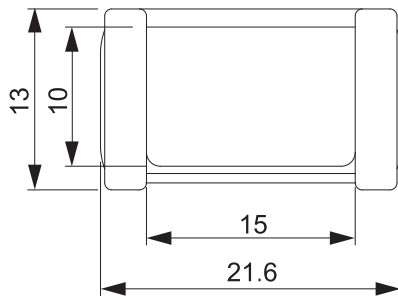

CPS015.15 Type

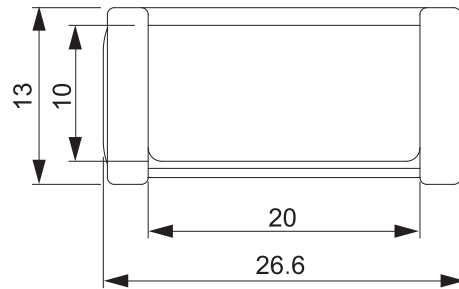

CPS015.20 Type


CHAIN RADIUS, WEIGHT

Chain Type	Bending Radius(R)	Weight in kg/m
CPS 015.06	18, 28, 38	0.100
CPS 015.10		0.106
CPS 015.15		0.111
CPS 015.20		0.115




MINI Type CPS 015


END BRACKET (TieWrap Type)

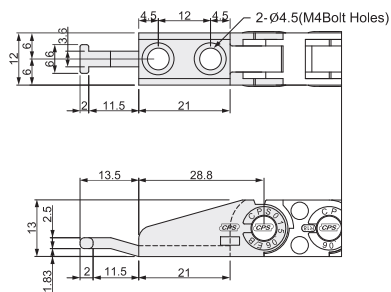


CPS015.06 Fixing point

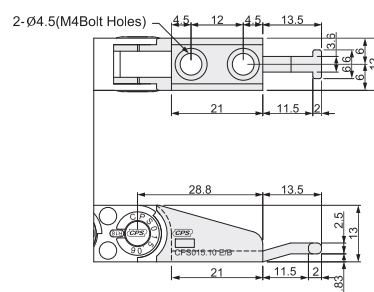


CPS015.06 Moving point

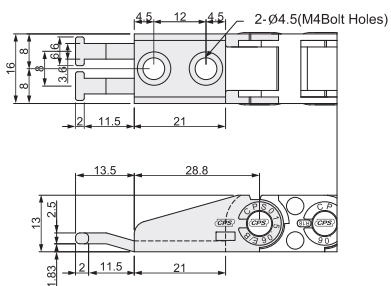


CPS015.10 Fixing point

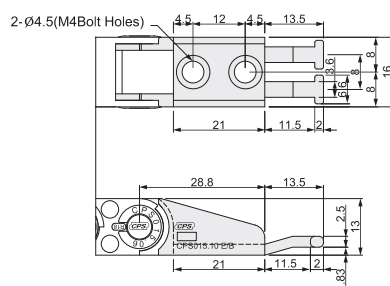


CPS015.10 Moving point

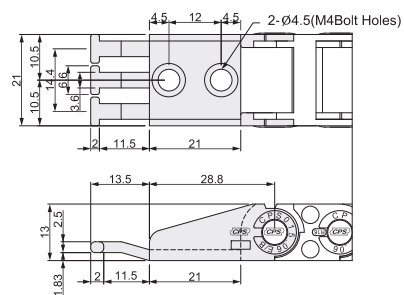


CPS015.15 Fixing point

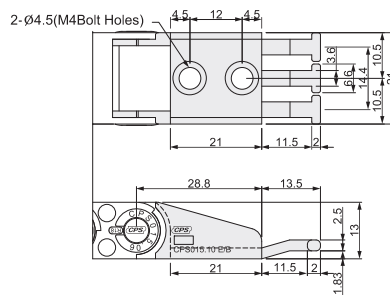

CPS015.15 Moving point

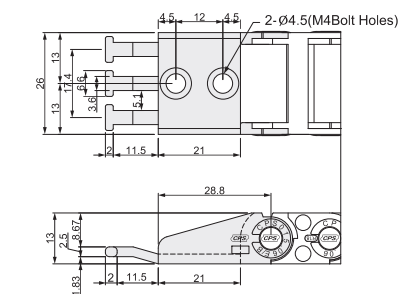

CPS015.20 Fixing point

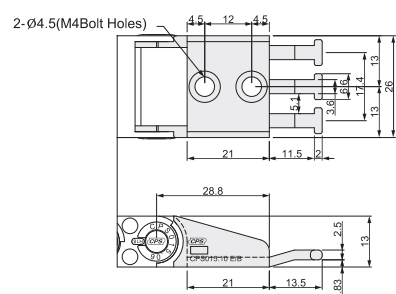

CPS015.20 Moving point