


## TIMING PULLEYS

同步带轮

## ■ L Series / 系列

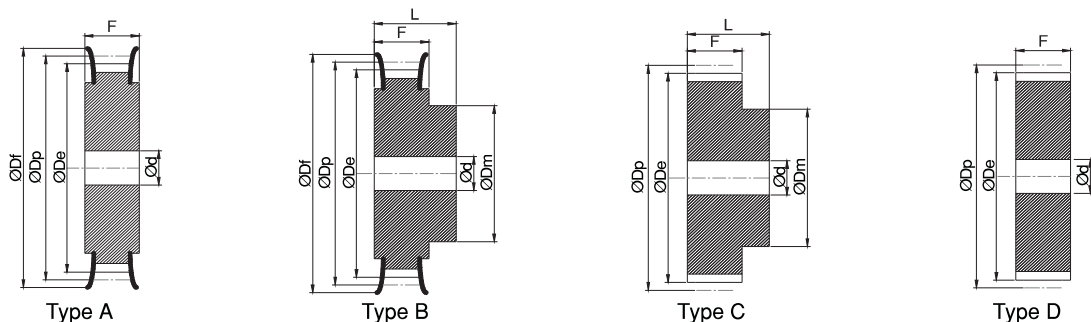

## • Dimensions / 尺寸

Unit / 单位 : mm

Type 类型	Teeth 齿数	Dp	De	Df	Dm	d	For Belt Width / 同步带宽度							
							050		075		100		150	
							12.7 mm		19.05 mm		25.4 mm		38.1 mm	
							F	L	F	L	F	L	F	L
A, B, C, D	10	30.32	29.55	36	20	8	19	28	25.4	38	31.8	45	44.5	58
A, B, C, D	11	33.35	32.58	38	24	8	19	30	25.4	38	31.8	45	44.5	58
A, B, C, D	12	36.38	35.61	42	26	8	19	30	25.4	38	31.8	45	44.5	58
A, B, C, D	13	39.42	38.65	44	28	8	19	30	25.4	38	31.8	45	44.5	58
A, B, C, D	14	42.45	41.68	48	28	8	19	30	25.4	38	31.8	45	44.5	58
A, B, C, D	15	45.48	44.71	51	34	8	19	30	25.4	38	31.8	45	44.5	58
A, B, C, D	16	48.51	47.74	54	36	8	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	17	51.54	50.77	57	36	10	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	18	54.58	53.81	60	40	10	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	19	57.61	56.84	63	40	10	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	20	60.64	59.87	66	45	10	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	21	63.67	62.90	71	45	10	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	22	66.70	65.93	75	45	10	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	23	69.74	68.97	79	55	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	24	72.77	72.00	79	55	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	25	75.80	75.03	83	58	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	26	78.83	78.06	87	58	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	27	81.86	81.09	87	58	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	28	84.90	84.13	91	58	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	29	87.93	87.16	93	58	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	30	90.96	90.19	97	70	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	32	97.02	96.25	103	70	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	34	103.09	102.32	111	70	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	35	106.12	105.35	111	70	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	36	109.15	108.38	115	70	12	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	40	121.28	120.51	127	70	15	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	42	127.34	126.57	135	70	15	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	44	133.41	132.64	142	70	15	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	45	136.44	135.67	142	70	15	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	48	145.54	144.77	152	70	15	19	32	25.4	38	31.8	45	44.5	58
A, B, C, D	60	181.92	181.15	-	75	15	19	42	25.4	45	31.8	50	44.5	60
A, B, C, D	72	218.30	217.53	-	75	15	19	42	25.4	45	31.8	50	44.5	60

- Non-standard Timing Pulleys are machined on request. Please contact us.

如要求设计非标准规格的同步带轮，请与我们联系。

## ORDERING EXAMPLE

订购示例

- Specifications / 规格

